

Installation Instructions

Peignen A 45

with device series

Door control unit

TSG

Documentation history

No.	Ver.	Status	Processed by
1	1.0	02.05.2013	Rau
2	1.1	11.12.2015	JE
3	1.2	30.12.19	CSA



Fordern Sie die Umbauanleitung **auf Deutsch** an,
indem Sie den QR Code einscannen.



Demandez les instructions d'instruction de
montage **en français**, en scannant le code QR.

Langer & Laumann Ing.-Büro GmbH
Wilmsberger Weg 8
48565 Steinfurt
Germany

Phone: +49 (2552) 92 7 91 0

E-mail: info@LuL-Ing.de

Web: www.LuL-Ing.de

© 2019 Langer & Laumann Ingenieurbüro GmbH All rights reserved

All rights for these operating instructions and the product described therein are reserved for **Langer & Laumann Ingenieurbüro GmbH** or their suppliers. In accordance with the laws of copyright protection, these operating instructions may not be copied in whole or in part without written approval of **Langer & Laumann Ingenieurbüro GmbH**, except as part of normal use of the product or to create a back-up copy. However, this exceptional provision does not extend to copies created for third parties or that are sold or transferred to third parties in any other manner. The whole of the material acquired (including all back-up copies) may, however, be transferred to third parties or made available on loan. According to the provisions of the law, preparing a translation also falls under the definition of copying.

Langer & Laumann Ingenieurbüro GmbH assumes no warranty or guaranty for the content of these operating instructions. It declines any legal guaranty regarding the marketability or suitability for a specific purpose. Langer & Laumann Ingenieurbüro GmbH is not responsible for errors in these operating instructions or for direct or indirect damages associated with delivering, performing or using these operating instructions. Langer & Laumann Ingenieurbüro GmbH reserves the right to revise these operating instructions from time to time without advance notification and to make changes to the content.

Table of contents

1	Essential information	4
1.1	Value of assembly instructions	4
1.2	Copyright protection	4
1.3	Instructions in the assembly manual	4
1.4	Informal activities performed by the fitter	4
1.5	Requirements for assembly personnel	4
2	Activity performed	5
3	Advantages	5
4	Tools required	5
5	Conversion instructions	6
6	Illustrations	7
7	Contact	12

1 Essential information

1.1 Value of assembly instructions

The product assembly instructions are provided by the manufacturer or supplier to provide the information required by the customer or fitter to ensure proper, safe and reliable assembly. These brief assembly instructions serve to clarify the basic steps of mechanical assembly. The electrical connection, commissioning and settings of the TSG are explicitly not part of these instructions.

1.2 Copyright protection

We reserve all rights for this technical documentation. It may not be duplicated, made accessible to third parties or otherwise used in an unauthorised manner without our prior consent. Any changes require our explicit and prior written consent.

1.3 Instructions in the assembly manual

All instructions in the assembly manual must be followed without exception.

1.4 Informal activities performed by the fitter

The system fitter is personally responsible for participating in a training course. He or she must inform the manufacturer/supplier without delay of any missing or defective parts in the delivery.

1.5 Requirements for assembly personnel



Persons responsible for installation and maintenance must be instructed regarding generally applicable safety and labour health requirements. They must be familiar with Langer&Laumann products. Installation tools must be fully functional and measuring instruments must be subject to continuous monitoring.

2 Activity performed

Replacement of the Peignen door operator with a  **Langer & Laumann Ing. Büro GmbH TSG door operator.**

The purpose of the conversion is to replace the existing Peignen drive with a TSG drive.

3 Advantages

- Very economical package.
- Quick and easy replacement of the existing door operator with a TSG from  **Langer & Laumann Ing. Büro GmbH.**
- **Just a few** mechanical attachments are required.
- All necessary parts are included with delivery.
- Conversion can be performed **very quickly** and **easily**.
- The electrical wiring can also be performed by **less experienced fitters**.
- **No hand-held** terminal is required for setting parameters. All parameters can easily be adjusted on the device.
- **Measurements can be performed very easily.**
- The conversion kit is available from  **Langer & Laumann Ing. Büro GmbH** as **warehouse inventory**.

4 Tools required

Metal drill bits 6, 9, and 11 mm
Fork wrenches size 8, 10, 13, 17
Screwdriver
Side cutter

5 Conversion instructions



NOTE:

The order of assembly listed here is simply a recommendation. There is no claim of completeness.

1. Disassembly of the existing compressed air operated drive. The compressed air hoses are no longer needed. The control line for switching the valves is required after the conversion to generate commands for opening and closing on the TSG.
2. Assembly of the TSG drive in the motor support.
3. Assembly of the TSG counter roller with clamping station on support.
4. Assembly of the TSG toothed belt lock on the TSG door panel carrier.
5. Assembly of the TSG drive with support on the opening side in the door frame. Make certain the TSG drive is positioned as far out as possible.
6. Assembly of the TSG counter roller including the clamping station on the opposite side in door frame. Make certain the distance from the toothed wheel to the door frame is equal to the distance from the toothed wheel to the drive.
7. Assembly of toothed belt lock with door panel carrier on the door panel support. The toothed belt lock must be positioned at the height of the toothed belt or toothed wheels (must line up). It may be necessary to shorten the door panel carrier appropriately.
8. Set the toothed belt in place. Check the travel path.
9. Normally there are fixed end stops on the existing door on the opening side and on the closing side. The end stops must be correctly adjusted so that the door can move to the stops. If there are no fixed stops present, they must urgently be retrofitted.
10. Measure the TSG electronics unit. Make certain there is a fixed stop in both the open and closed positions. For the remainder of commissioning and electrical connection process, please refer to the TSG manual.

6 Illustrations



Fig. 1: Peignen shaft door - outside view



Fig. 2: Peignen: old door drive after removal

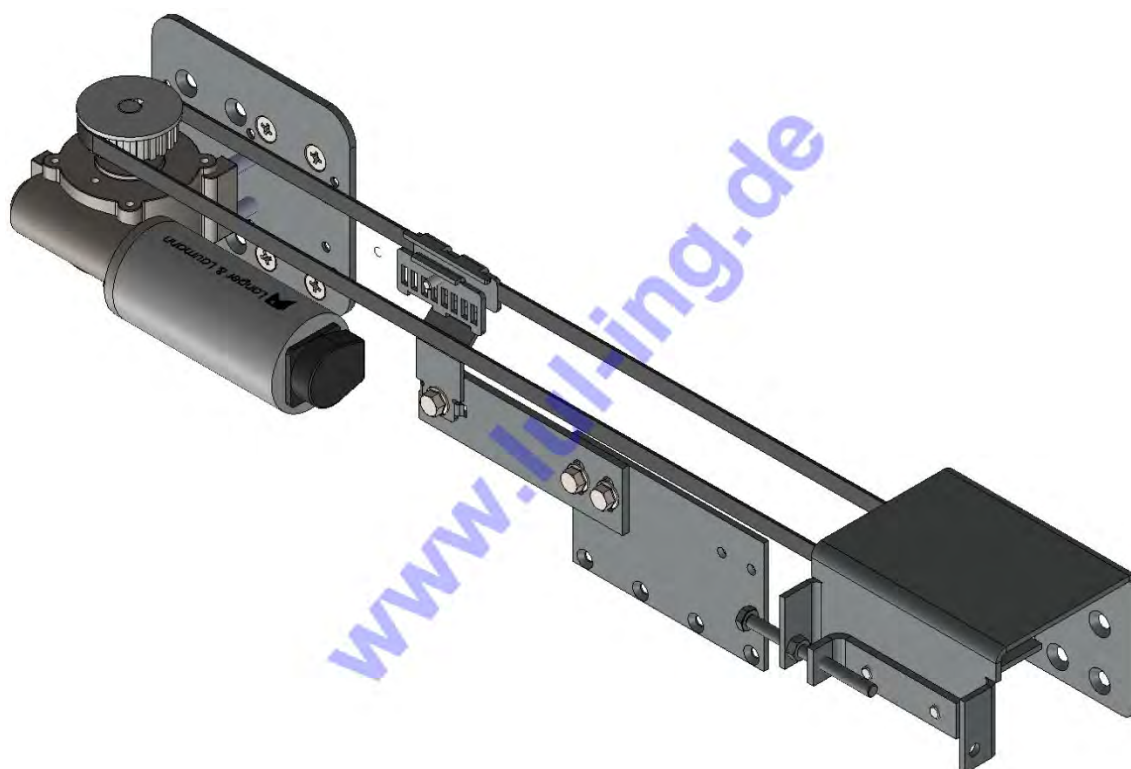


Abb. 3: Peignen A45 overview

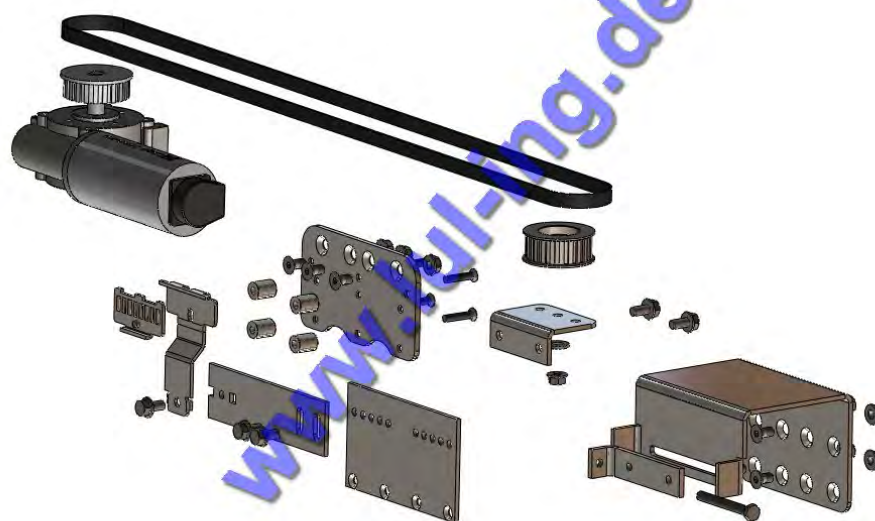


Abb. 4: Peignen A45 exploded view

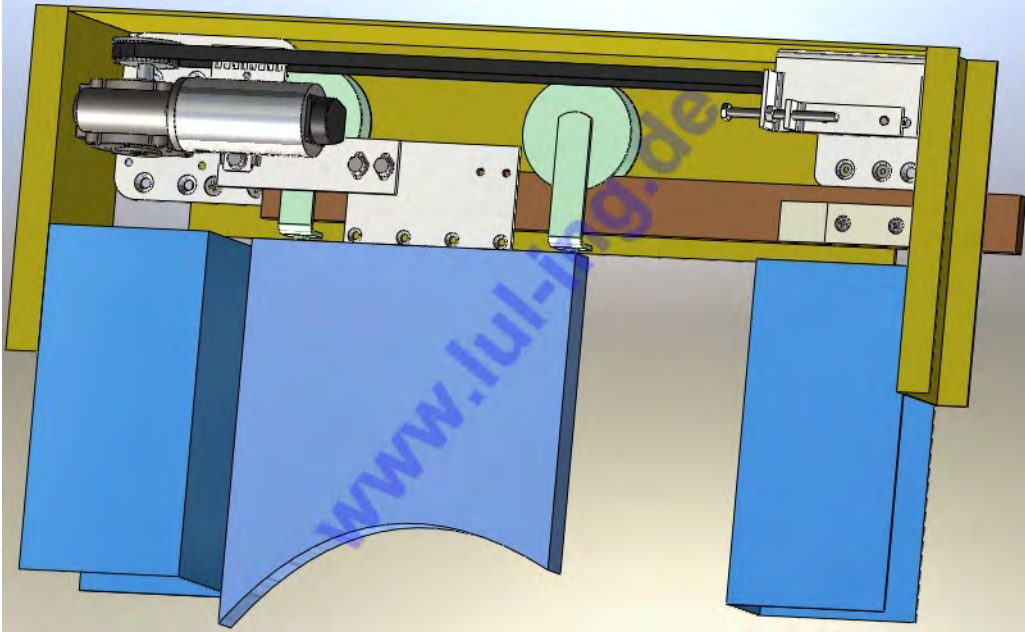


Abb. 5: Peignen A45 overview

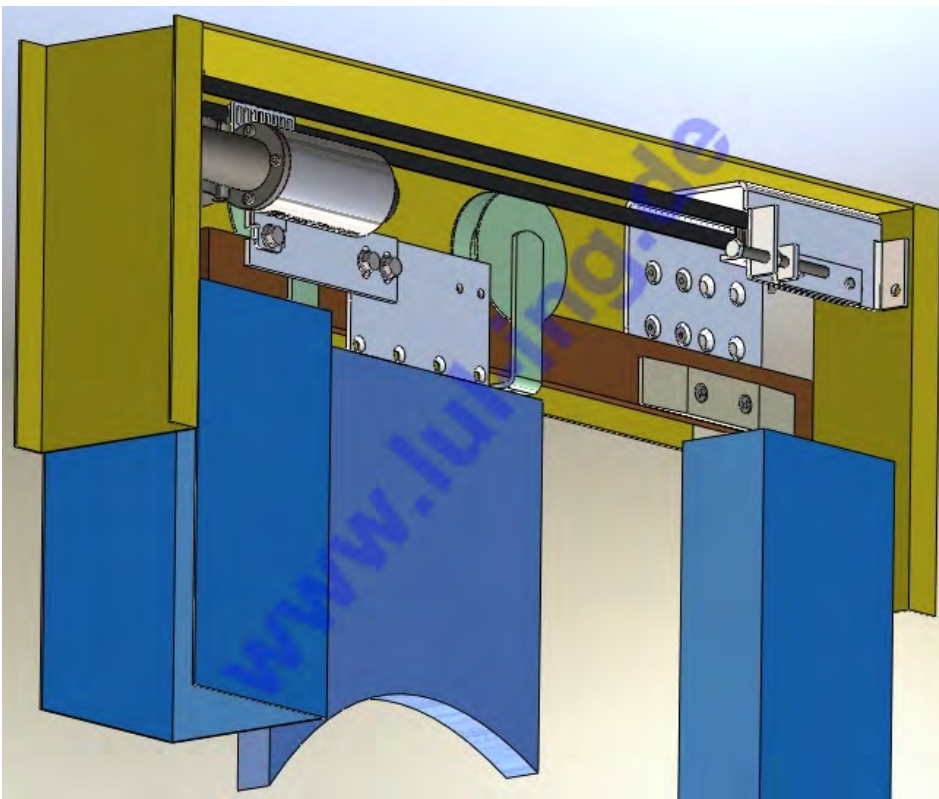


Abb. 6: Peignen A45 overview

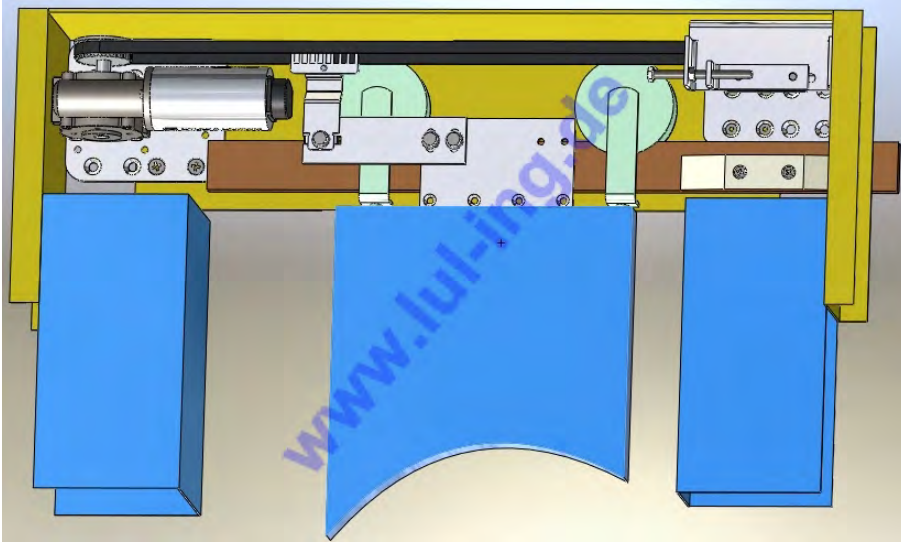


Abb. 7: Peignen A45 overview



Abb. 8: TSG in Peignen A45 Role holder counterside



Abb. 9: TSG in Peignen A45 Door catch



Abb. 10: TSG in Peignen A45 drive

7 Contact

If you have questions or are not certain about something, we can be reached at the following address:

Langer & Laumann Ing.-Büro GmbH
Wilmsberger Weg 8
48565 Steinfurt
Germany

Phone: +49 (2552) 92 7 91 0

E-mail: info@LuL-Ing.de

Web: www.LuL-Ing.de