



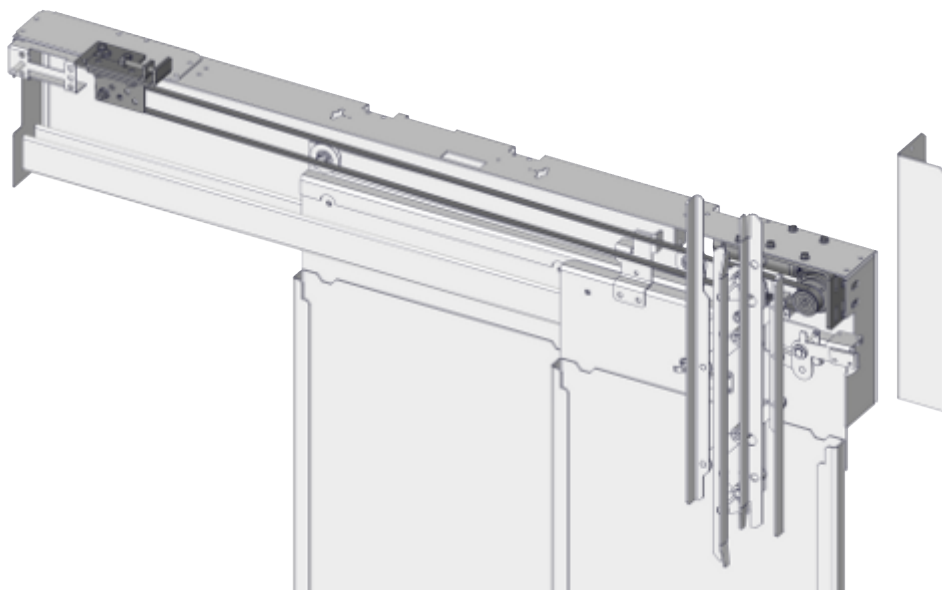

Conversion variant 1: low door frame, section 7

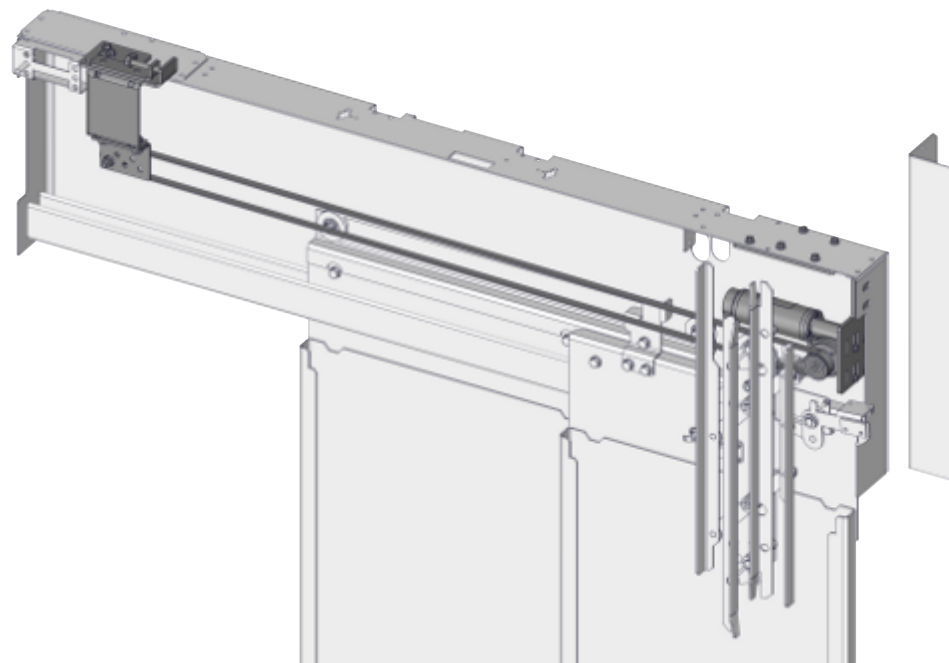

Conversion variant 2: high door frame, section 8

Conversion Instructions
Thyssen EDO-15 Lite
to TSG V4

Shows **TL**, **TR** is mirror image of it, **Z** like **TL**.

Imprint

Manufacturer	Langer & Laumann Ing.-Büro GmbH
Address	Wilmsberger Weg 8 48565 Steinfurt Germany
Phone	+49 (2552) 92791 0
E-mail	info@lul-ing.de
Internet	www.lul-ing.de

Dokument **in Deutsch** durch Scannen des QR-Codes anfordern.



Obtenir le document **en français** en scannant le code QR.



1 About these instructions

1.1 Purpose

These conversion instructions contain important information and general mechanical assembly steps for the conversion of an existing system. These instructions must be observed to avoid hazards, repair costs and downtimes and increase the reliability and service life of the system.

1.2 Scope

These conversion instructions apply to the following conversion kit:

- Thyssen EDO-15 Liteto TSG V4

1.3 Version information

The version number of these conversion instructions is shown on the front page and footer of each page.

Always retain and use the latest version of all documents.

Using an outdated version of this and any required and supplementary documentation can lead to incorrect assembly.

1.4 Contact information

See page 2.

1.5 Customers for whom these instructions are intended

These conversion instructions are intended for end customers of Langer & Laumann Ing.-Büro GmbH.

To ensure correct operation of the system, in addition to reading these conversion instructions, personnel must have the following qualifications and relevant technical knowledge:

- Extensive technical knowledge of these systems
- Thorough knowledge of the operating instructions of these systems
- Recognised as a qualified specialist

1.6 Other applicable documents

The following documents are required for work not described in these conversion instructions:

- Fitting instructions for the door control unit with information on electrical connection, fitting and commissioning
- Information on components not manufactured and supplied by Langer & Laumann

2 Safety

2.1 General safety instructions

Personnel must have carefully read and understood these conversion instructions before starting the conversion work.

The safety instructions and guidelines specified in these conversion instructions must be observed.

The accident prevention regulations applicable at the place of use and general safety regulations must be observed.

2.2 Personnel requirements

2.2.1 Personnel qualification and scope of work

The tasks described in this manual set different requirements for the qualification of the assigned personnel. Inadequately qualified employees are not able to correctly assess the risks and expose themselves and others to the risk of injuries. It is prohibited for inadequately qualified personnel to be in the working/danger zone. Persons whose ability to respond is influenced, for example, by drugs, alcohol or medication may not work on the facility.

Skilled personnel Work on mechanical components may only be carried out by suitably qualified skilled personnel (lift installer for defined tasks in lift construction according to DGUV 303-001).

Electrically skilled personnel Work on electrical components may only be carried out by electrically skilled personnel or lift installers with further training as an electrically skilled person for defined tasks in lift construction according to DGUV 303-001.

2.2.2 Personal protective equipment

Personal protective equipment is used to protect people against health and safety impairments during their work. The specified protective equipment must be worn.


Symbol	Meaning
	Wearing protective work clothing protects against hazards in the workplace.
	Wearing slip-resistant safety footwear protects against injuries to the feet.
	Wearing cut and puncture-resistant protective gloves protects against injuries to the hands.
	Wearing a protective cap protects against head injuries.
	Wearing goggles protects against eye injuries.
	Wearing hearing protection protects against hearing damage.
	Wearing a fall arrest system protects against falls.

Table 1: Personal protective equipment

2.3 Warnings

2.3.1 Structure of warning notices

All warning notices in this document are structured as follows:

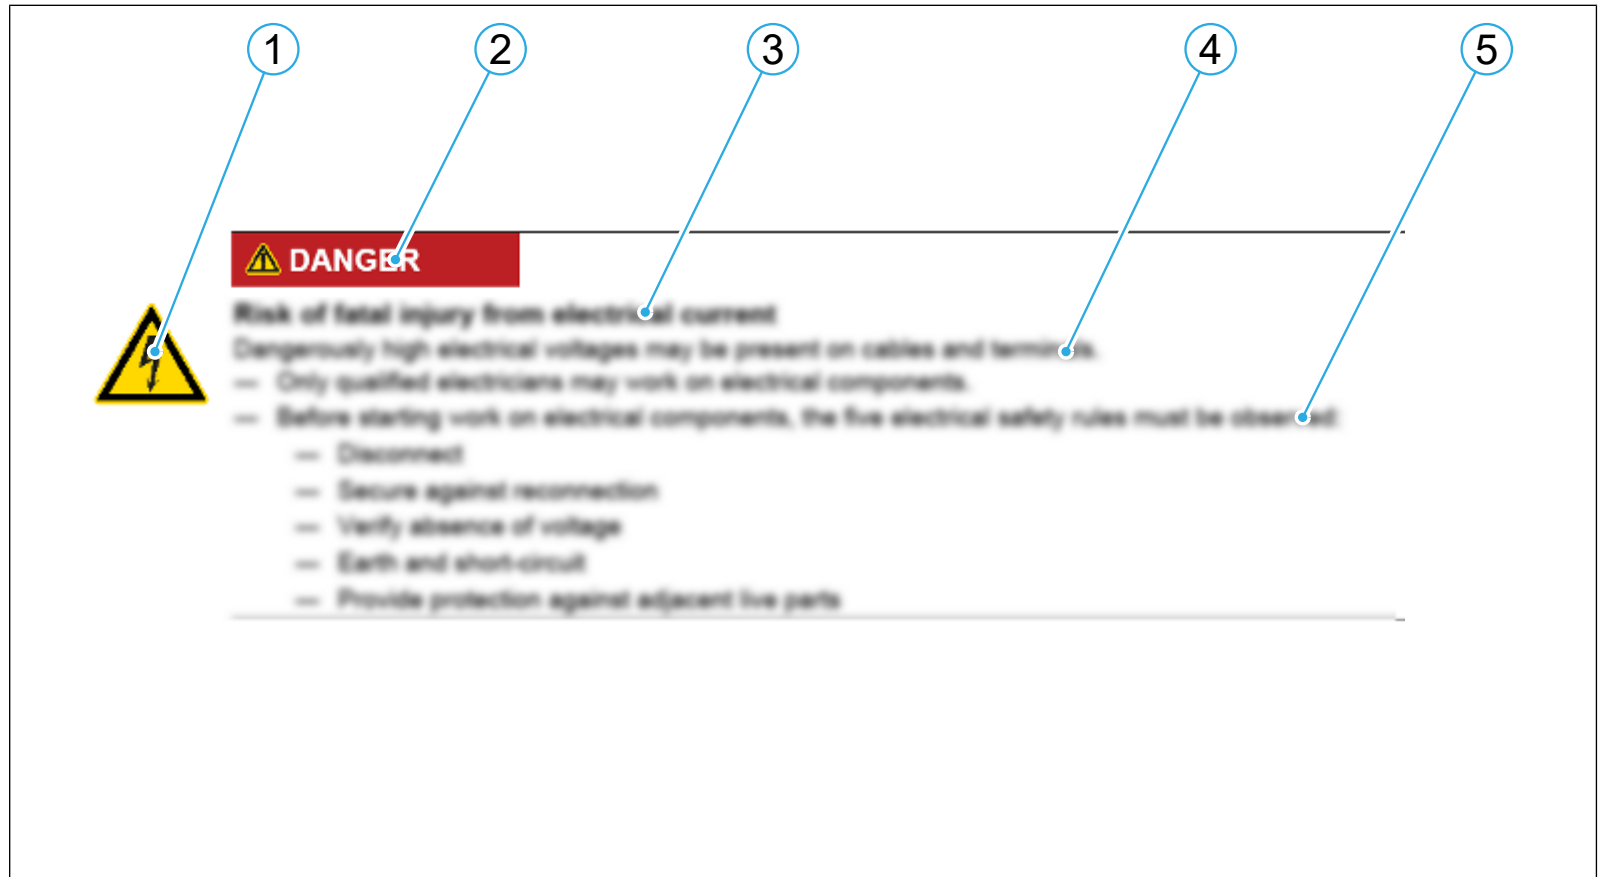

1	Hazard symbol	2	Signal word
3	Type and source of hazard	4	Possible consequences of non-observance
5	Procedure for hazard prevention		

2.3.2 Meaning of signal words and symbols

The following signal words are used in this document:

Signal word	Meaning, consequences if not prevented
DANGER	Warns of an imminent hazardous situation which results in death or serious injury.

Table 2: Meaning of signal words


The following hazard symbols are used in this document:



Symbol	Designation
	Automatic start-up
	Electrical hazard

Table 3: Meaning of hazard symbols

3 In the box

The conversion kit components are shown in the table. The position numbers are used in the following chapters to identify the individual components. For logistical reasons, the packaging can contain further components that are not required for actual use.

Pos.	Illustration	Item number	Description	Quantity
P001		8.20.xxxxx.04	TSG electronics	1
P002		8.20.200xx.xx	TSG motor	1

Pos.	Illustration	Item number	Description	Quantity
P003		1.20.60013	L-shaped bracket	1
P004		1.20.60110	L-shaped bracket	1
P005		1.20.60131	Deflection pulley, D = 37 mm, 5M	1
P006		1.20.60137	Timing belt, 5M	1
P007		1.20.60140	Timing belt pulley, D = 37 mm, 5M	1
P008		1.20.60550	Motor bracket, L-shaped	1
P009		1.20.60551	Motor bracket, L-shaped	1
P010		1.20.60552	Angle bracket, C-shaped	1

Pos.	Illustration	Item number	Description	Quantity
P011		1.20.60555	L-shaped bracket	1
P012		1.20.60561	Clamping plate 5M	1
P013		1.36.00115	Hexagon head screw M8 × 40 mm	1
P014		1.36.00130	Locking screw M5 × 12 mm	4
P015		1.36.00135	Locking screw M6 × 12 mm	3
P016		1.36.00137	Locking screw M6 × 20 mm	3
P017		1.36.00138	Locking screw M6 × 16 mm	2
P018		1.36.00169	Spring washer M8	1

Pos.	Illustration	Item number	Description	Quantity
P019		1.36.00440	Washer M8	1
P020		1.36.00501	Nut M8	3
P021		1.36.00502	Nut M6	5
P022		1.36.00710	Locking screw M8 × 16 mm	4
P023		1.36.00749	Locking screw M8 × 50 mm	1
P024		1.36.05040	Set screw M5 × 5 mm	1



4 Required tools

The tools required for the conversion are shown in the table. The position numbers are used in the following chapters to identify the individual tools.

Pos.	Symbol	Description
T001		Soft face hammer
T002		Hammer
T003		Puller for bearings and pinions
T004		Pipe wrench
T005		Side cutters
T006		Circlip pliers
T007		Angle grinder
T008		Measuring tool (folding rule or measuring tape)
T009		Slotted screwdriver
T010		Phillips screwdriver
T108		Combination spanner, size 8
T110		Combination wrench, size 10
T113		Combination wrench, size 13
T202.5		Allen key, size 2.5
T606.5		Drill bit, Ø 6.5 mm

5 Definition of door opening directions

The possible door opening directions are shown in the following table in schematic form.

L: Left opening	
R: Right opening	
TL: Telescopic left opening	
TR: Telescopic right opening	
C: Center opening	
CT: Center telescoping opening	
FD: Folding door	

6 Disassembly of existing components

DANGER



Danger to life from rotating/moving system components

- Before starting work, switch off the system completely.
- Keep away from unsecured rotating/moving system components.

DANGER




Risk of fatal injury from electrical current

Dangerously high electrical voltages may be present on cables and terminals.

- Only qualified electricians may work on electrical components.
- Before starting work on electrical components, the five electrical safety rules must be observed:
 - Disconnect
 - Secure against reconnection
 - Verify absence of voltage
 - Earth and short-circuit
 - Provide protection against adjacent live parts


Tools

Pos.	Symbol	Description
T002		Hammer
T003		Puller for bearings and pinions
T004		Pipe wrench
T005		Side cutters
T006		Circlip pliers
T007		Angle grinder
T1xx		Combination spanners, as needed

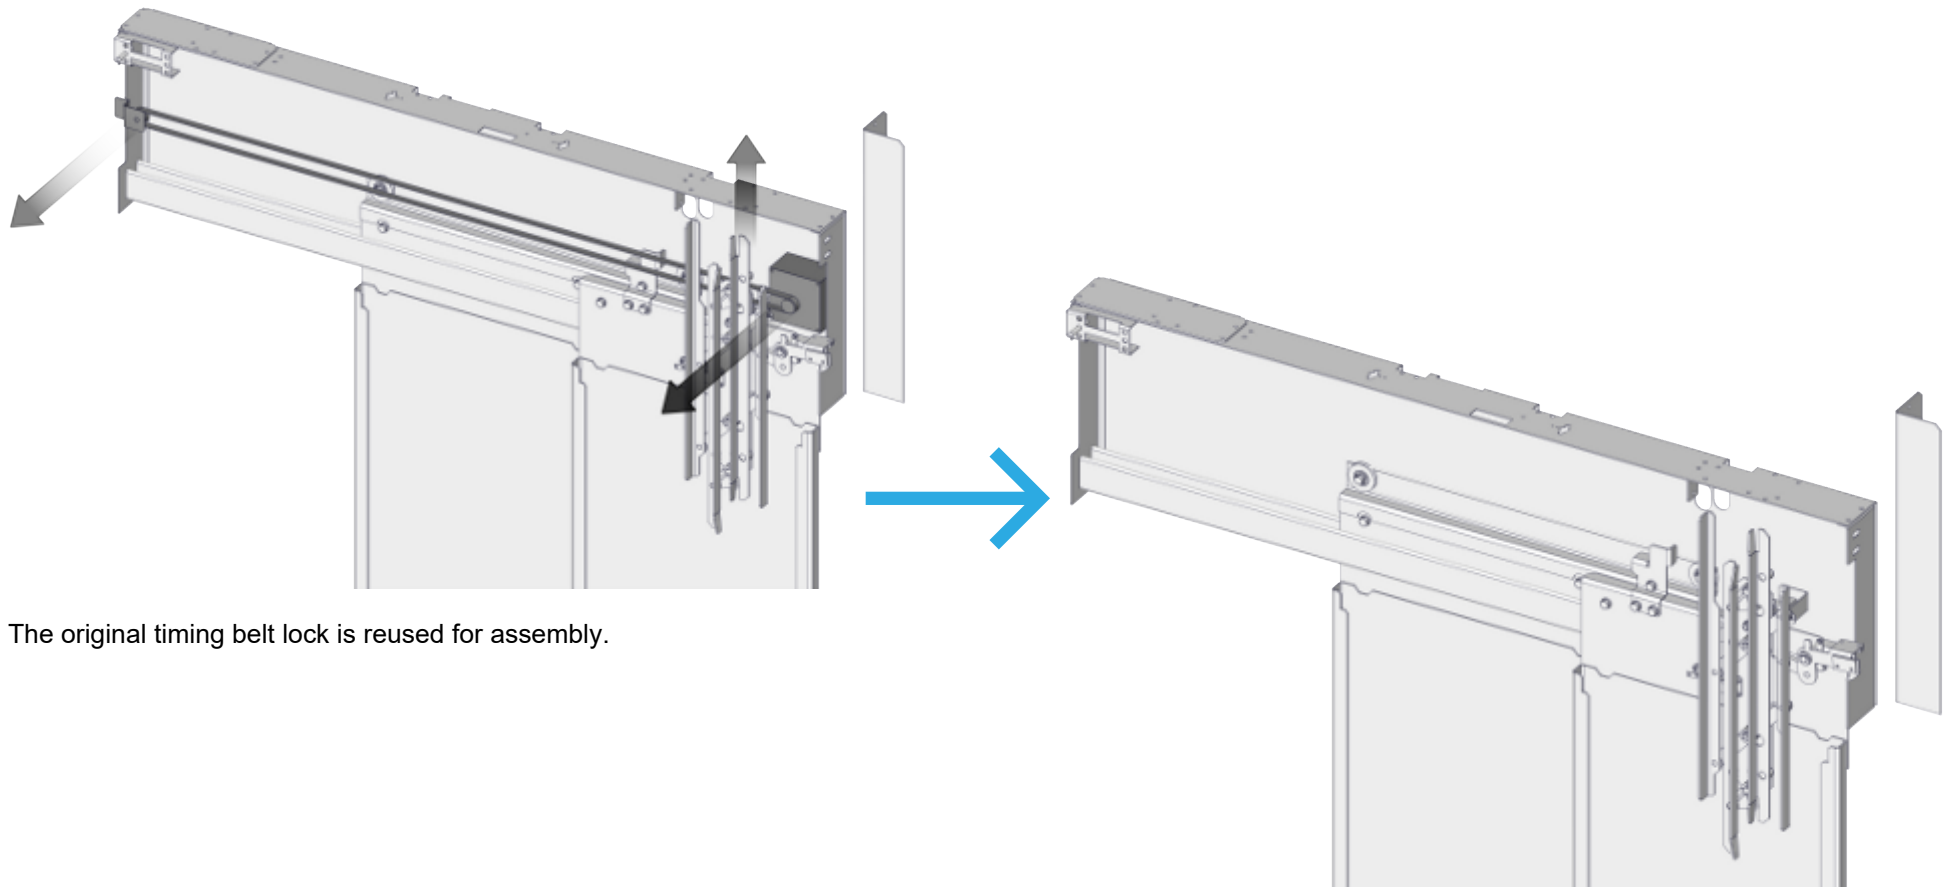

The original timing belt lock is reused for assembly.

Dismantling for conversion variant 1: low door frame

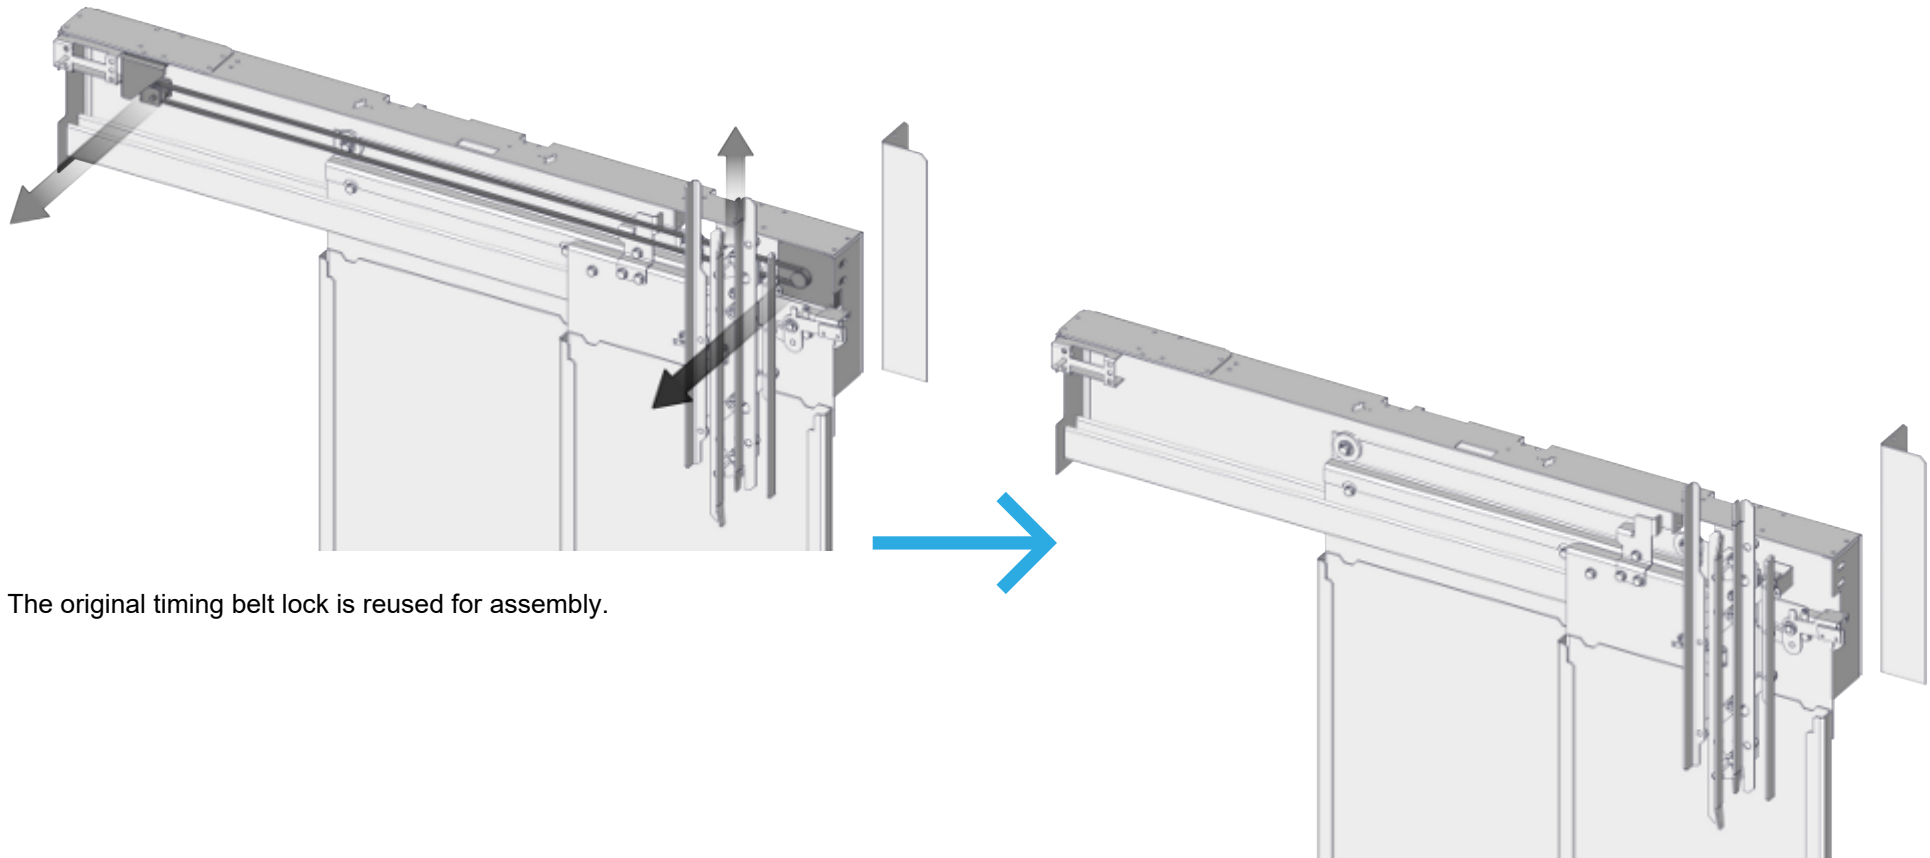

The original timing belt lock is reused for assembly.

Dismantling for conversion variant 2: high door frame

7 Mounting conversion variant 1: low door frame

7.1 Mounting the motor and bracket


Components


Pos.	Illustration	Item number	Description	Quantity
P002		8.20.200xx.xx	TSG motor	1
P007		1.20.60140	Timing belt pulley, D = 37 mm, 5M	1
P008		1.20.60550	Motor bracket, L-shaped	1
P014		1.36.00130	Locking screw M5 × 12 mm	4
P015		1.36.00135	Locking screw M6 × 12 mm	3
P017		1.36.00138	Locking screw M6 × 16 mm	2


Pos.	Illustration	Item number	Description	Quantity
P021		1.36.00502	Nut M6	2
P024		1.36.05040	Set screw M5 × 5 mm	1

Tools


Pos.	Symbol	Description
T108		Combination spanner, size 8
T110		Combination wrench, size 10
T202.5		Allen key, size 2.5
T606.5		Drill bit, Ø 6.5 mm

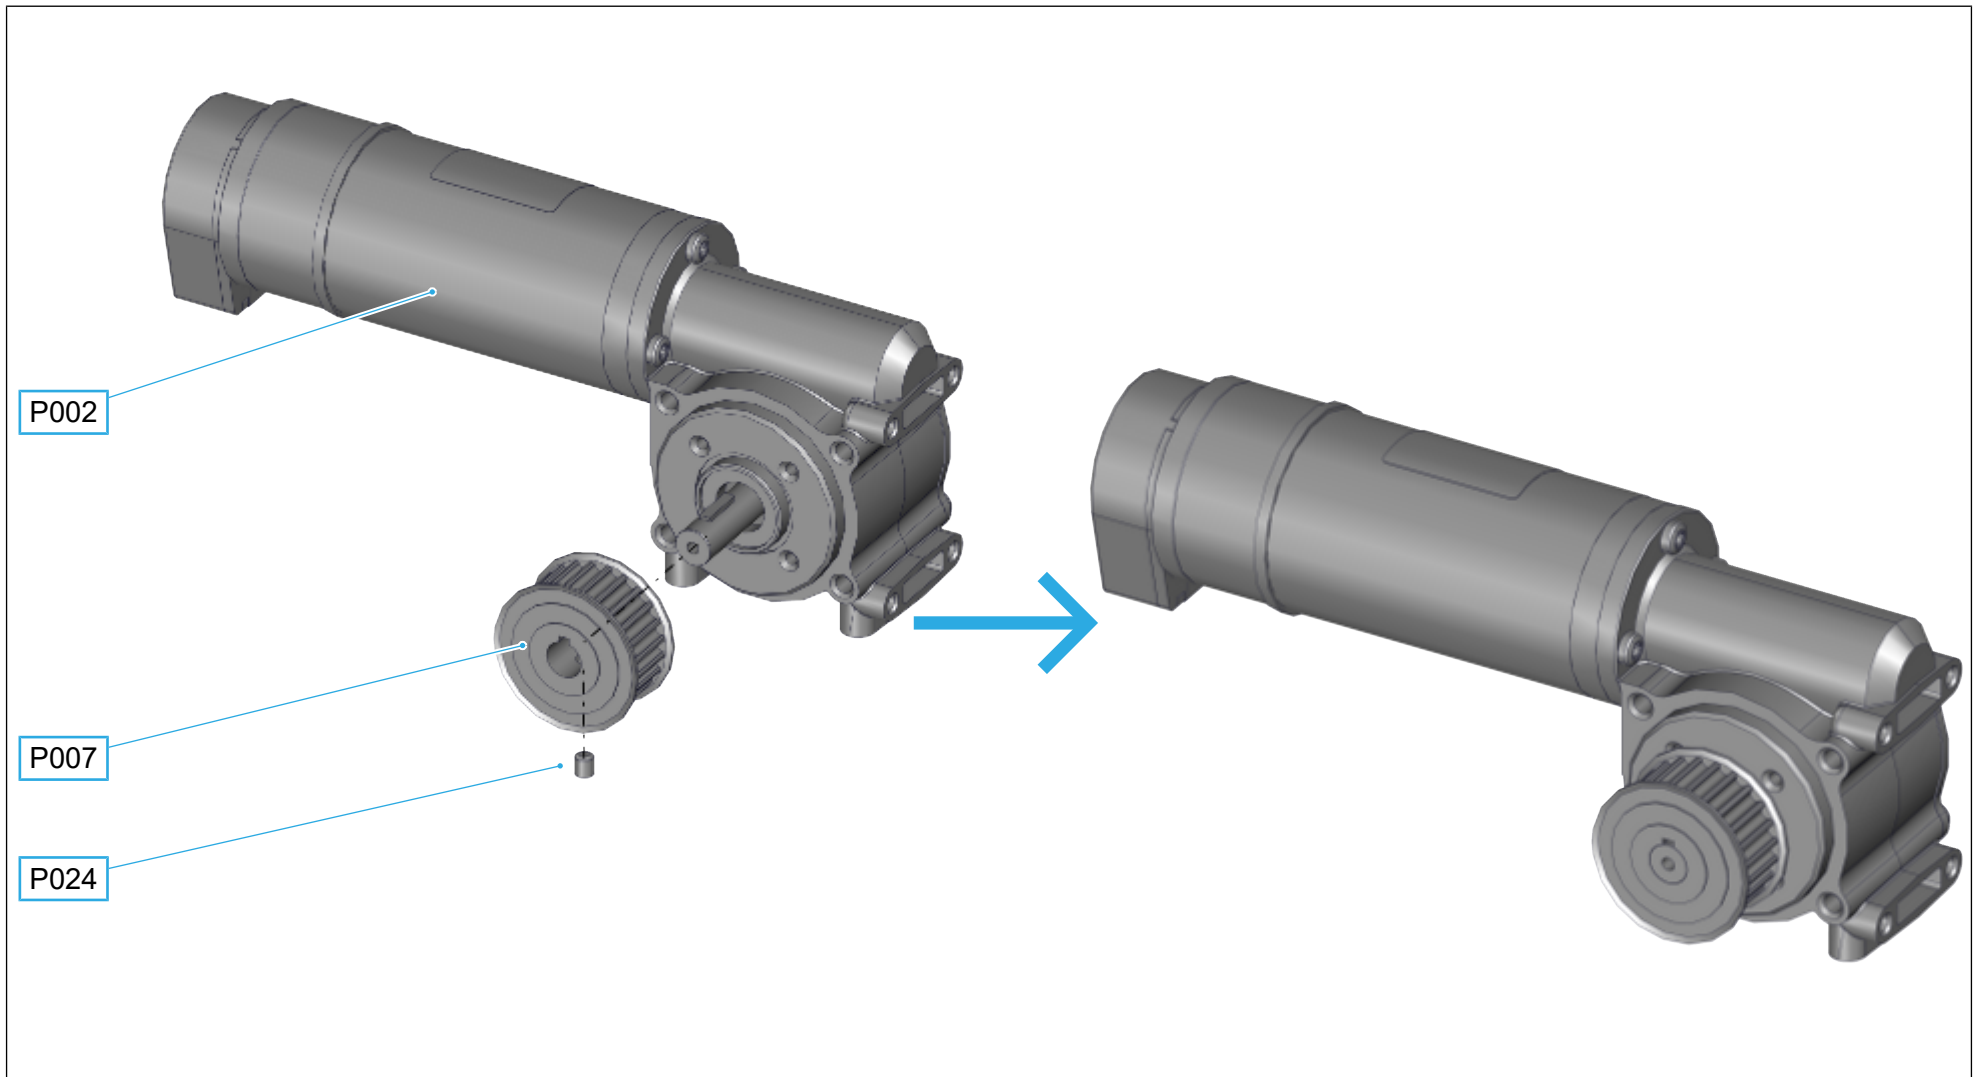

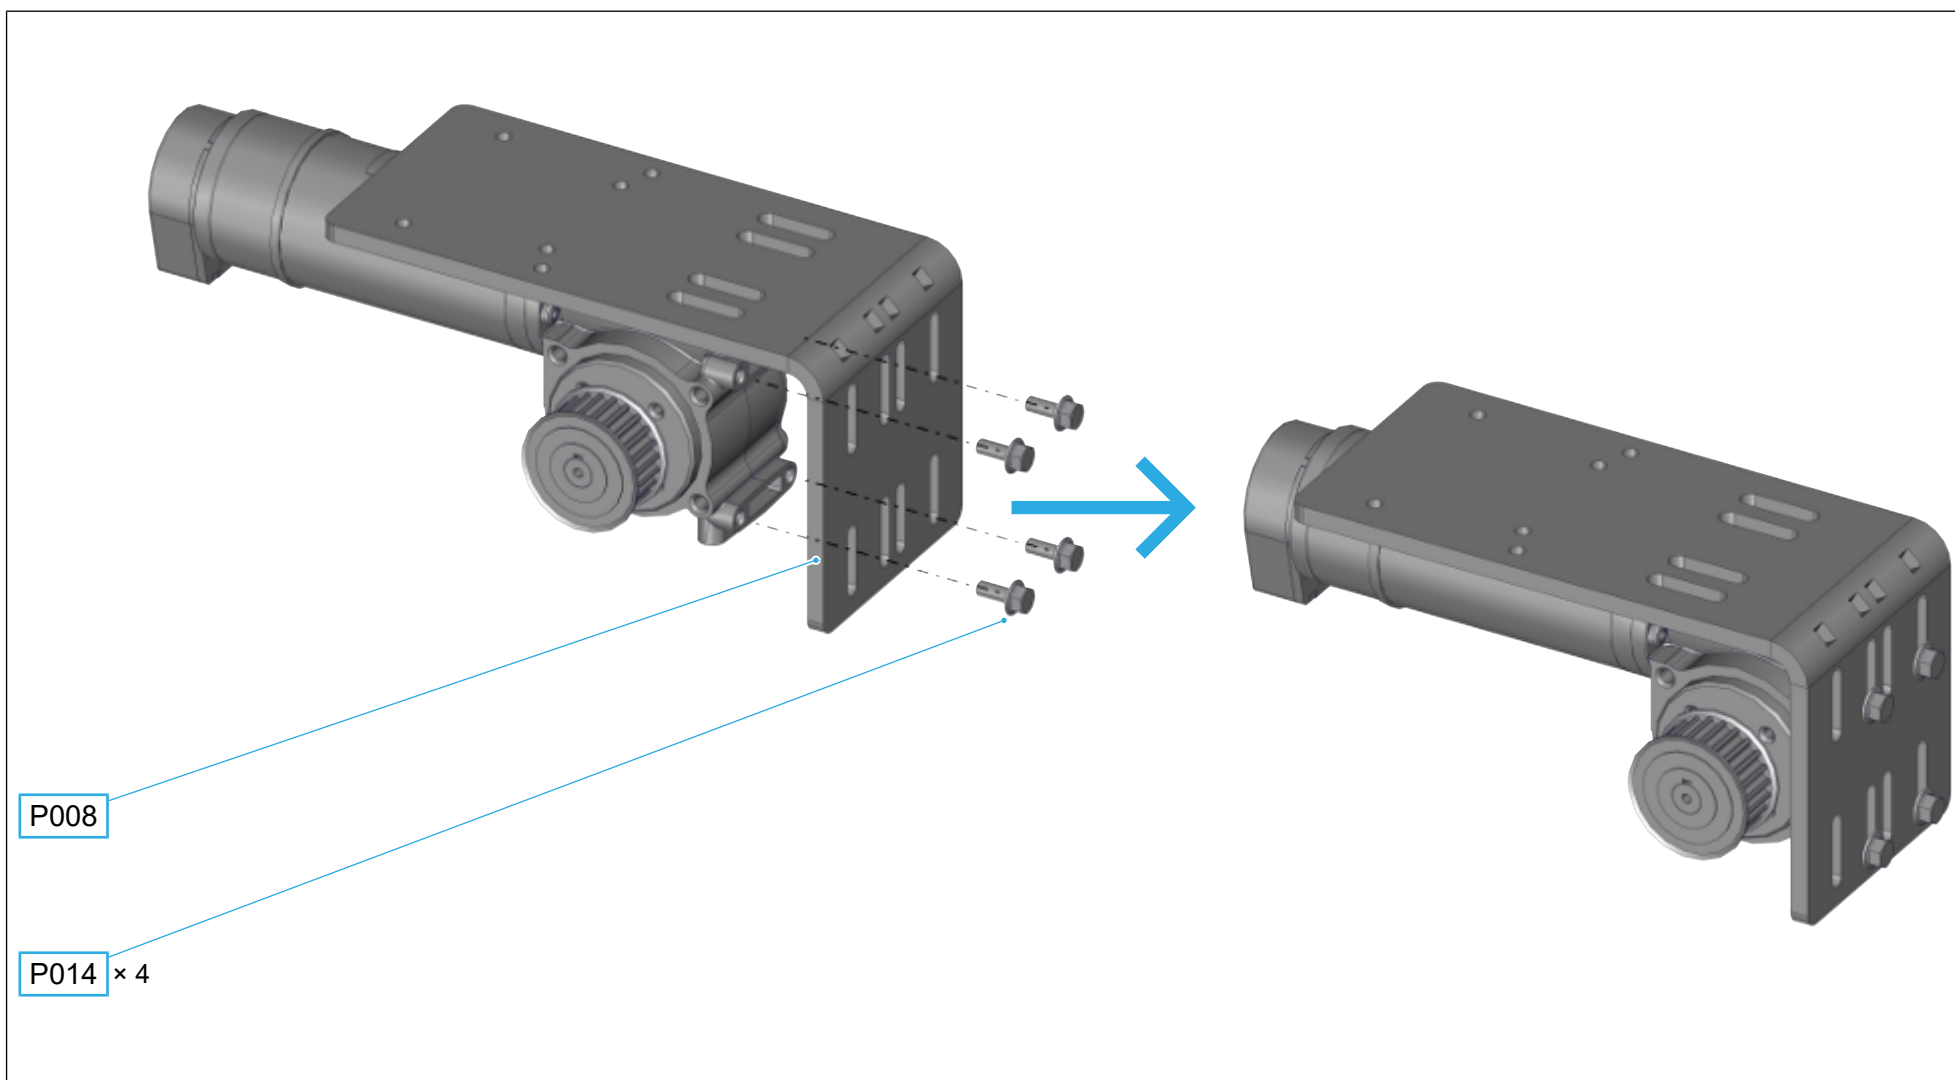

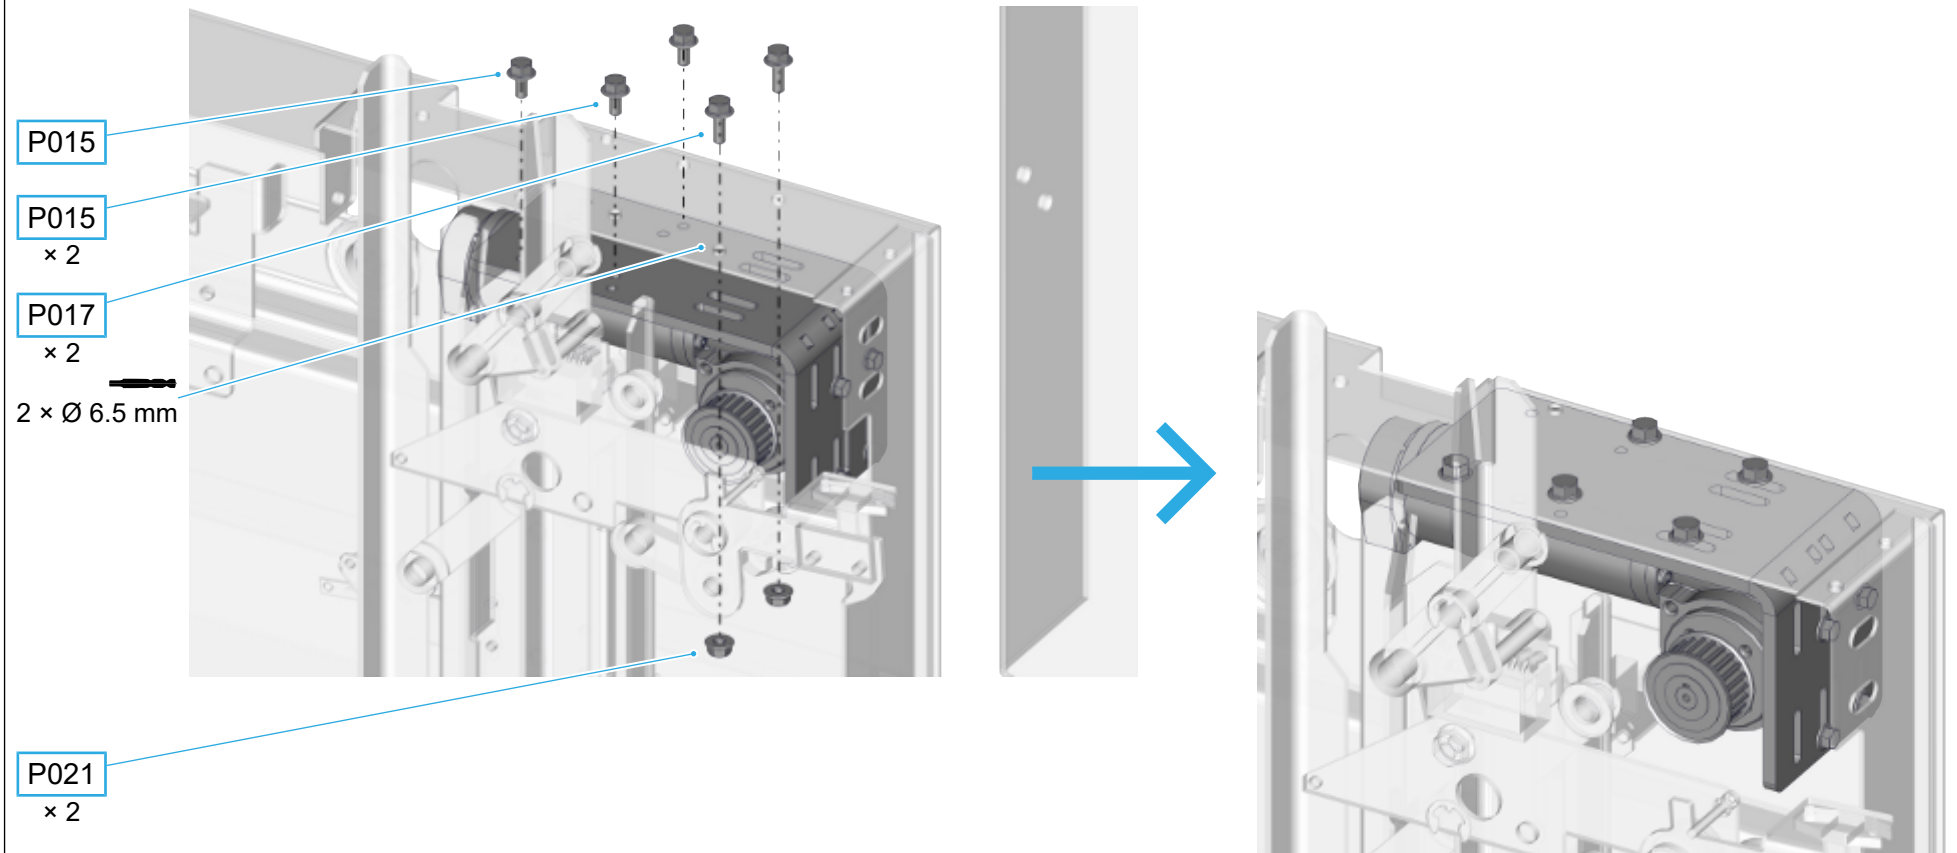



At the places which are locked with nuts, drill 2 x into the door frame.

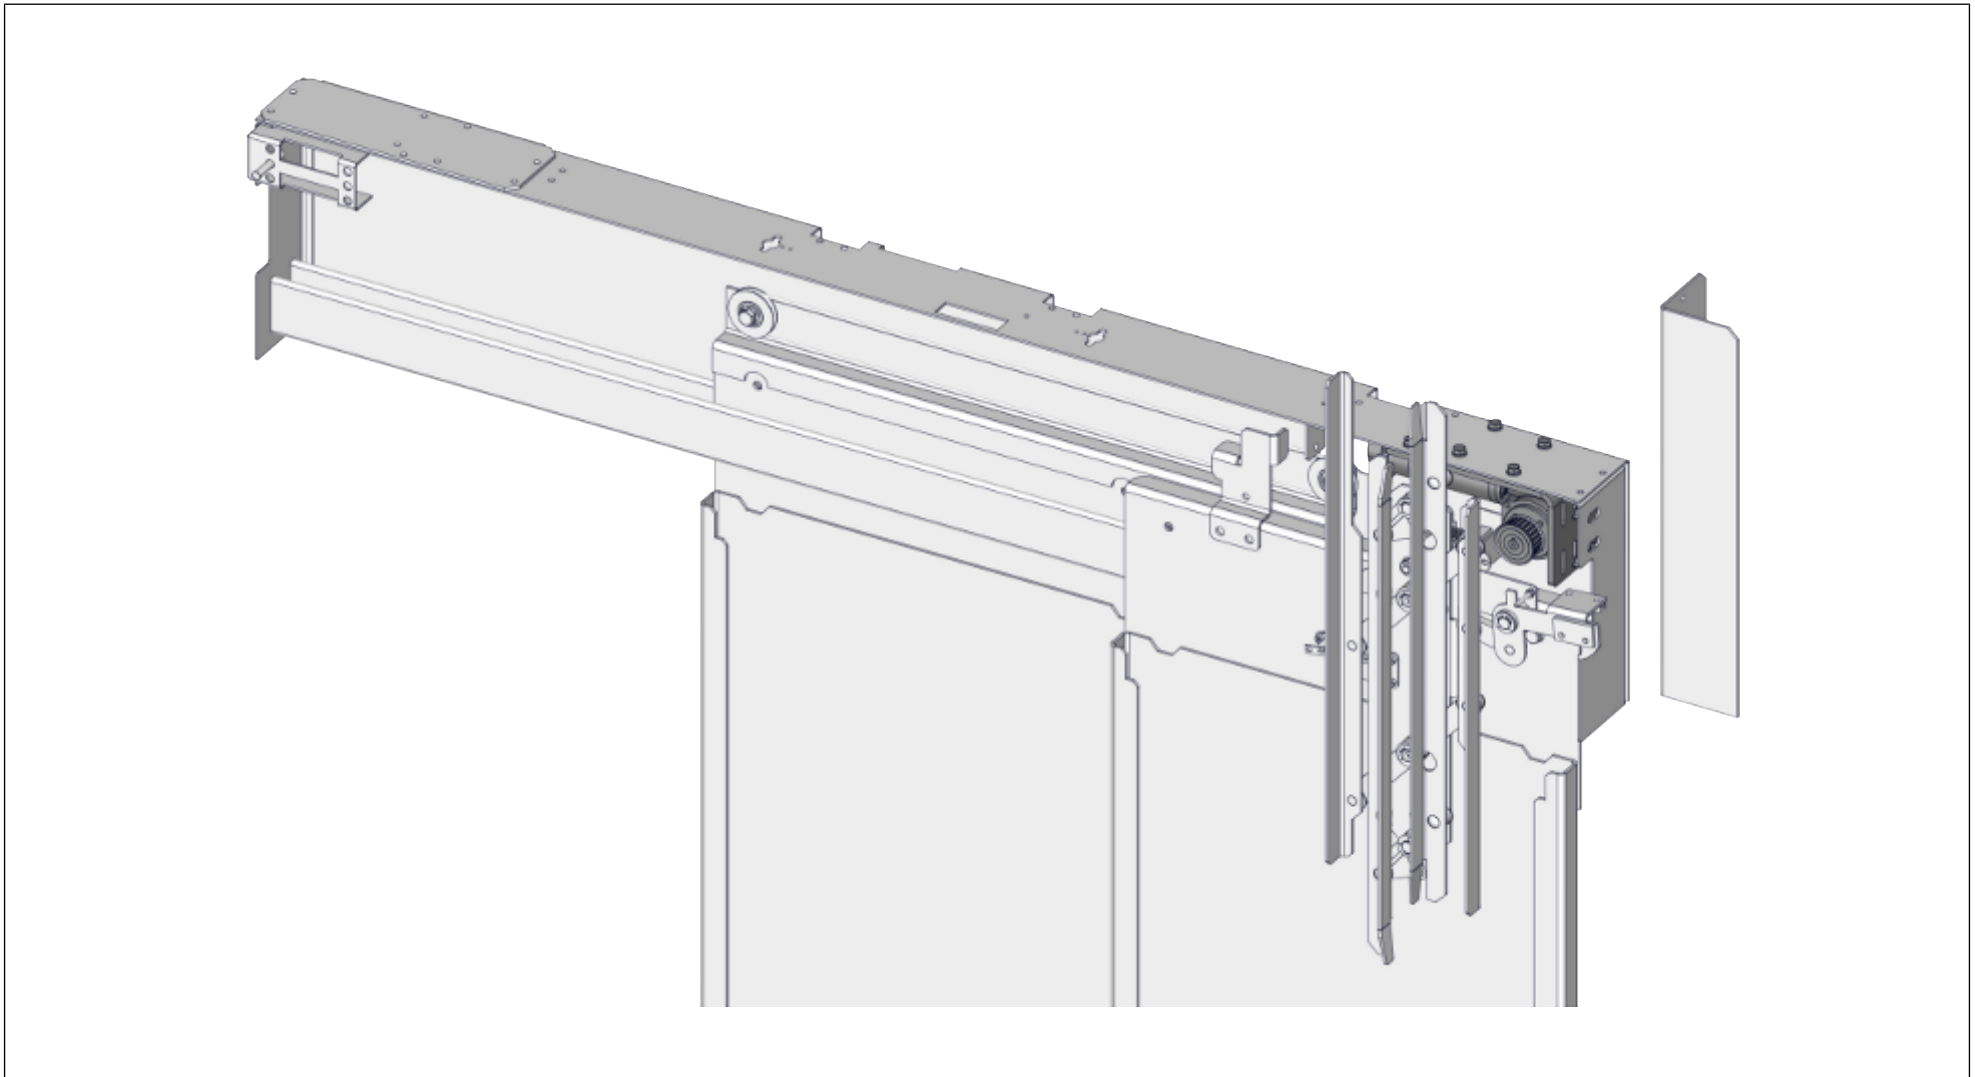

7.2 Mounting the deflection unit


Components


Pos.	Illustration	Item number	Description	Quantity
P003		1.20.60013	L-shaped bracket	1
P004		1.20.60110	L-shaped bracket	1
P005		1.20.60131	Deflection pulley, D = 37 mm, 5M	1
P011		1.20.60555	L-shaped bracket	1
P013		1.36.00115	Hexagon head screw M8 × 40 mm	1
P016		1.36.00137	Locking screw M6 × 20 mm	3
P018		1.36.00169	Spring washer M8	1


Pos.	Illustration	Item number	Description	Quantity
P019		1.36.00440	Washer M8	1
P020		1.36.00501	Nut M8	1
P021		1.36.00502	Nut M6	3
P022		1.36.00710	Locking screw M8 × 16 mm	2
P023		1.36.00749	Locking screw M8 × 50 mm	1


Tools

Pos.	Symbol	Description
T110		Combination wrench, size 10
T113		Combination wrench, size 13

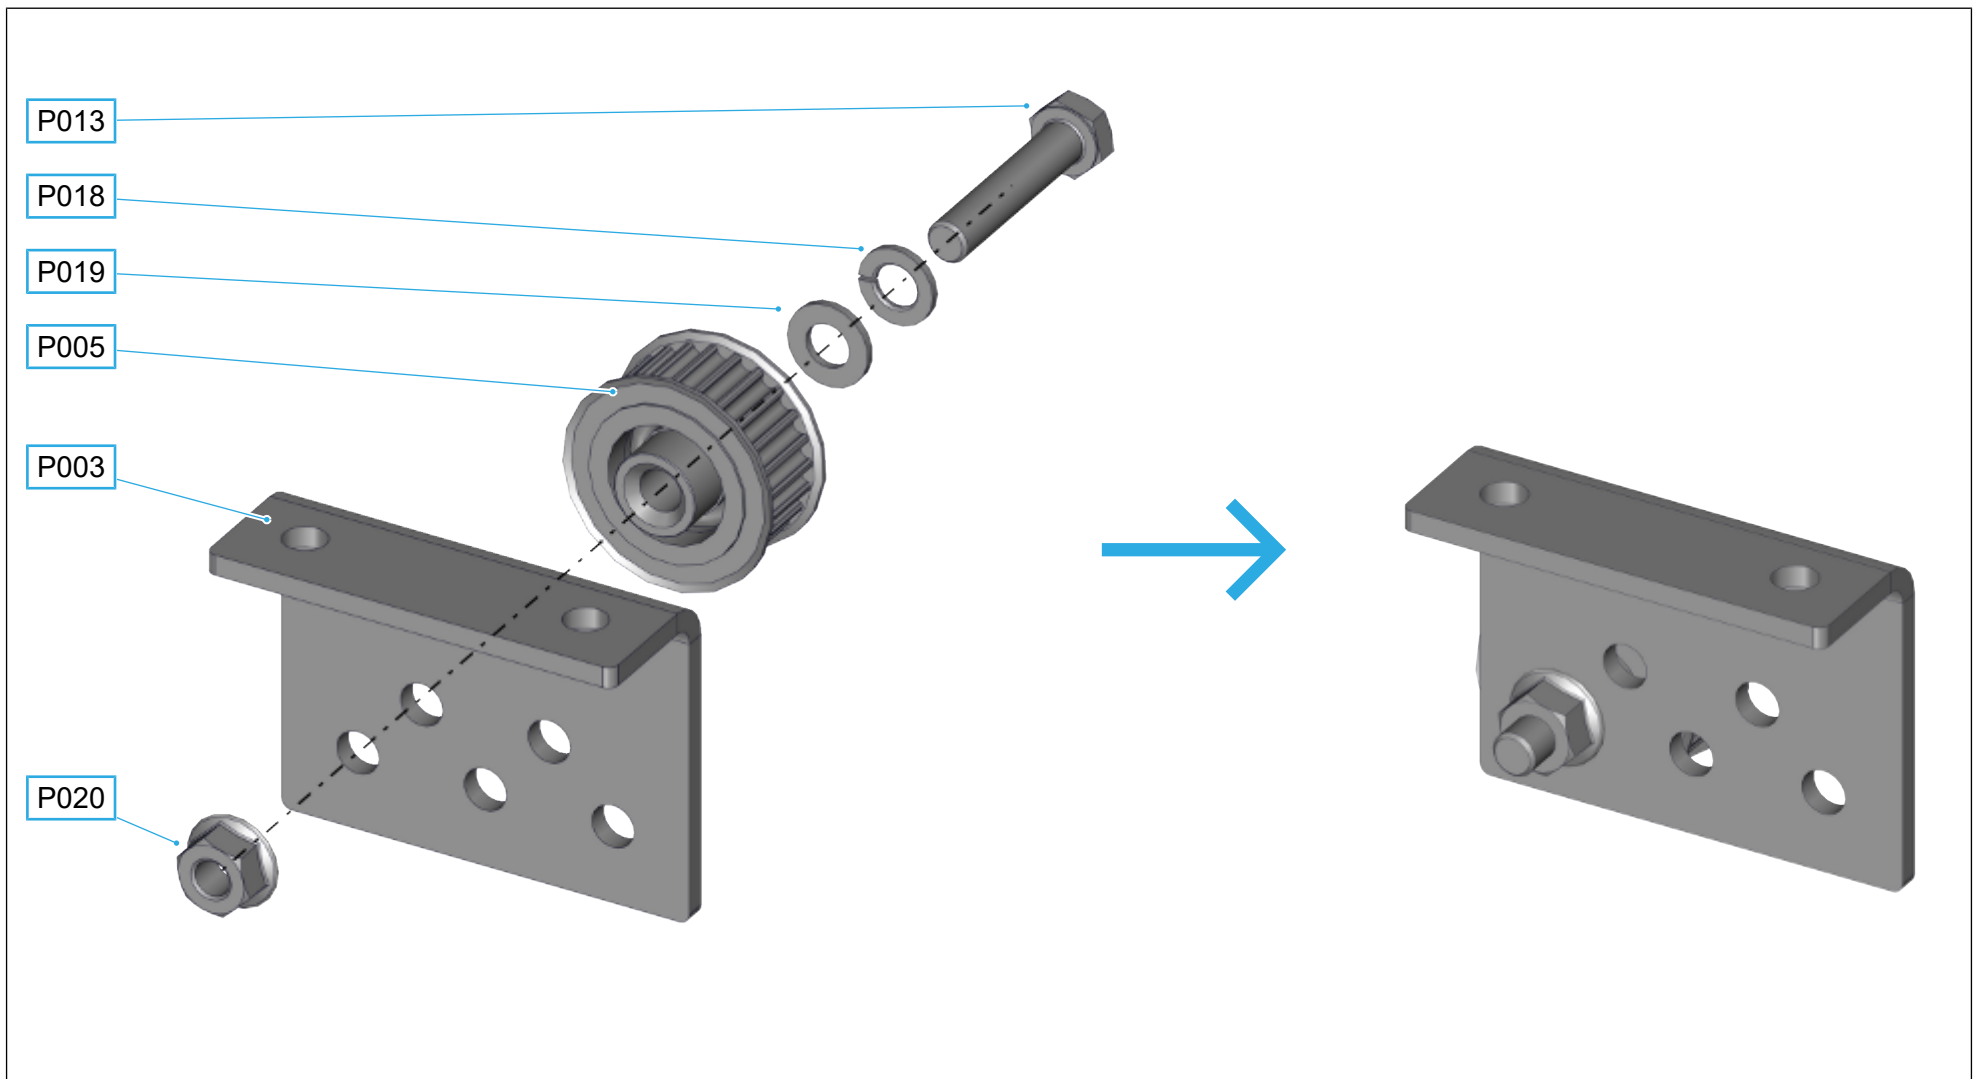

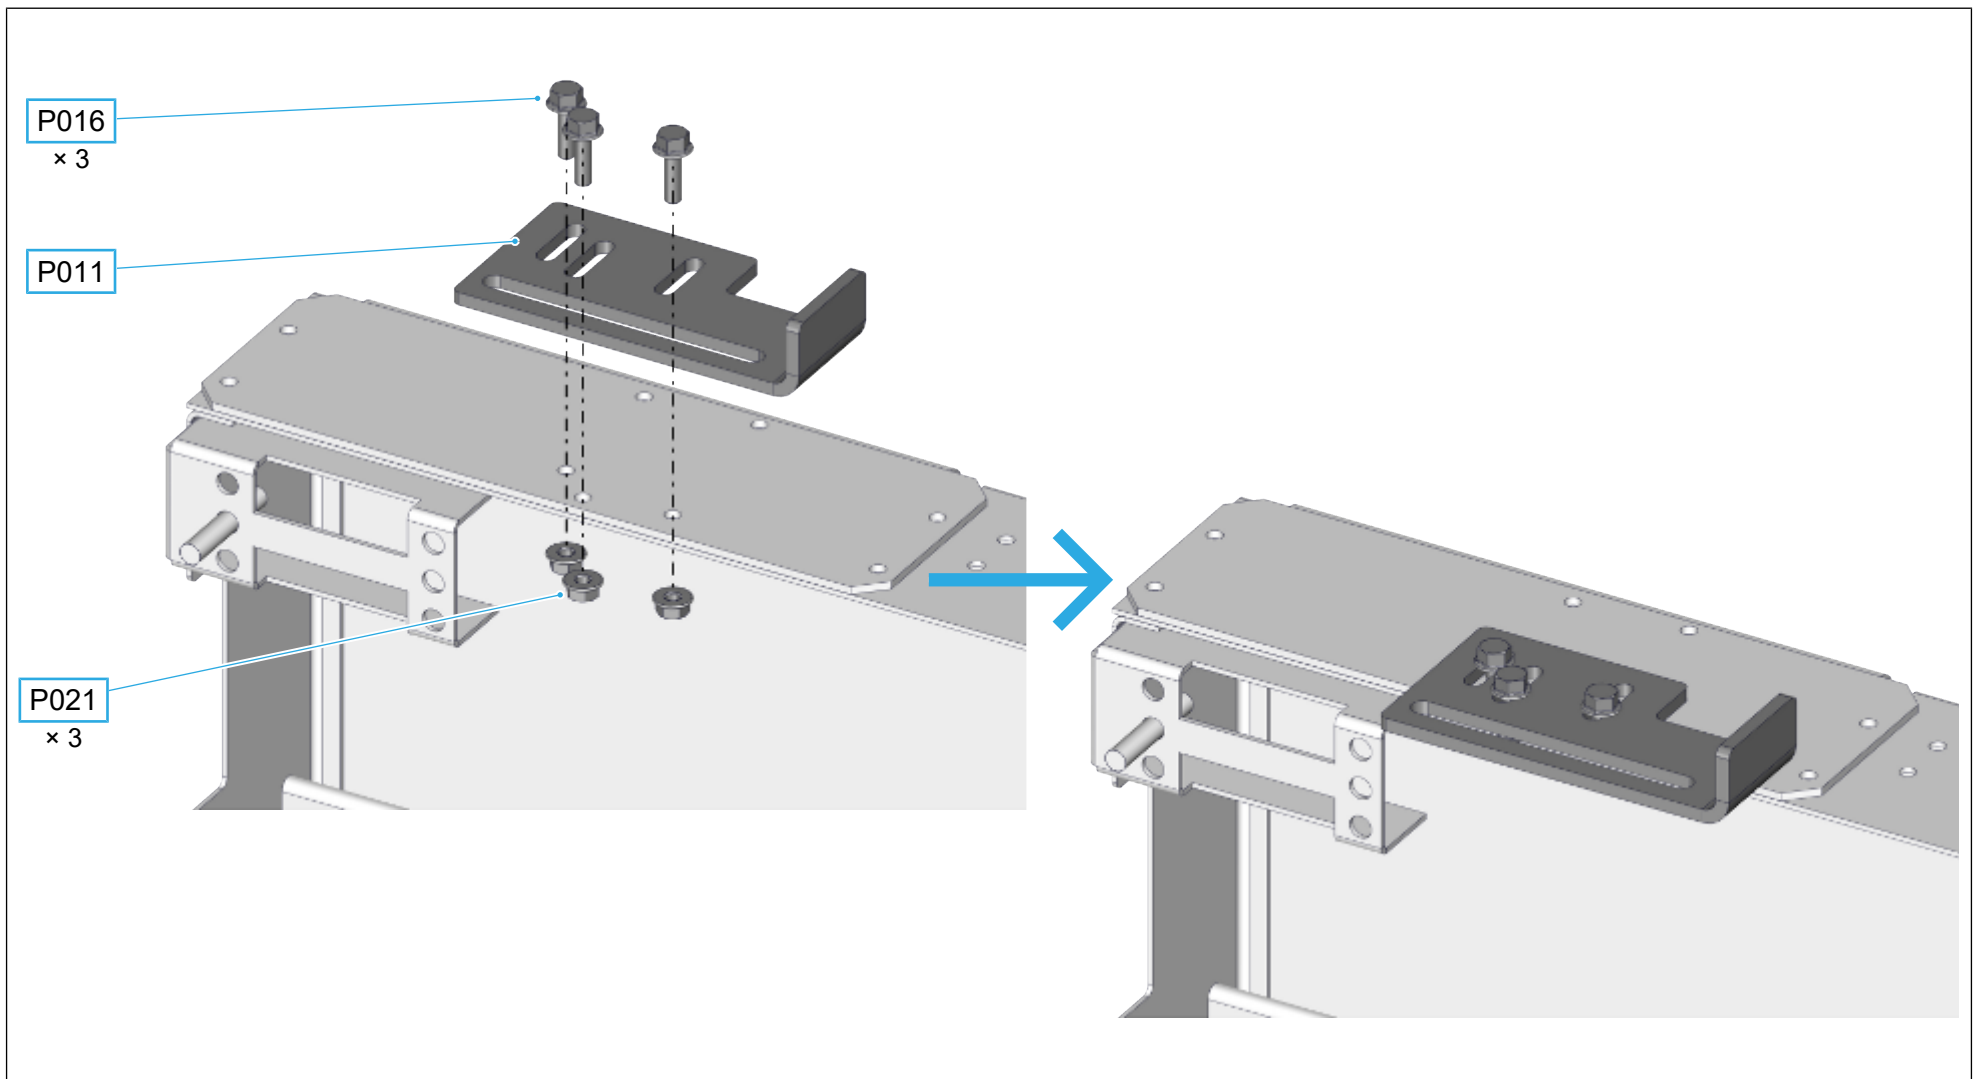

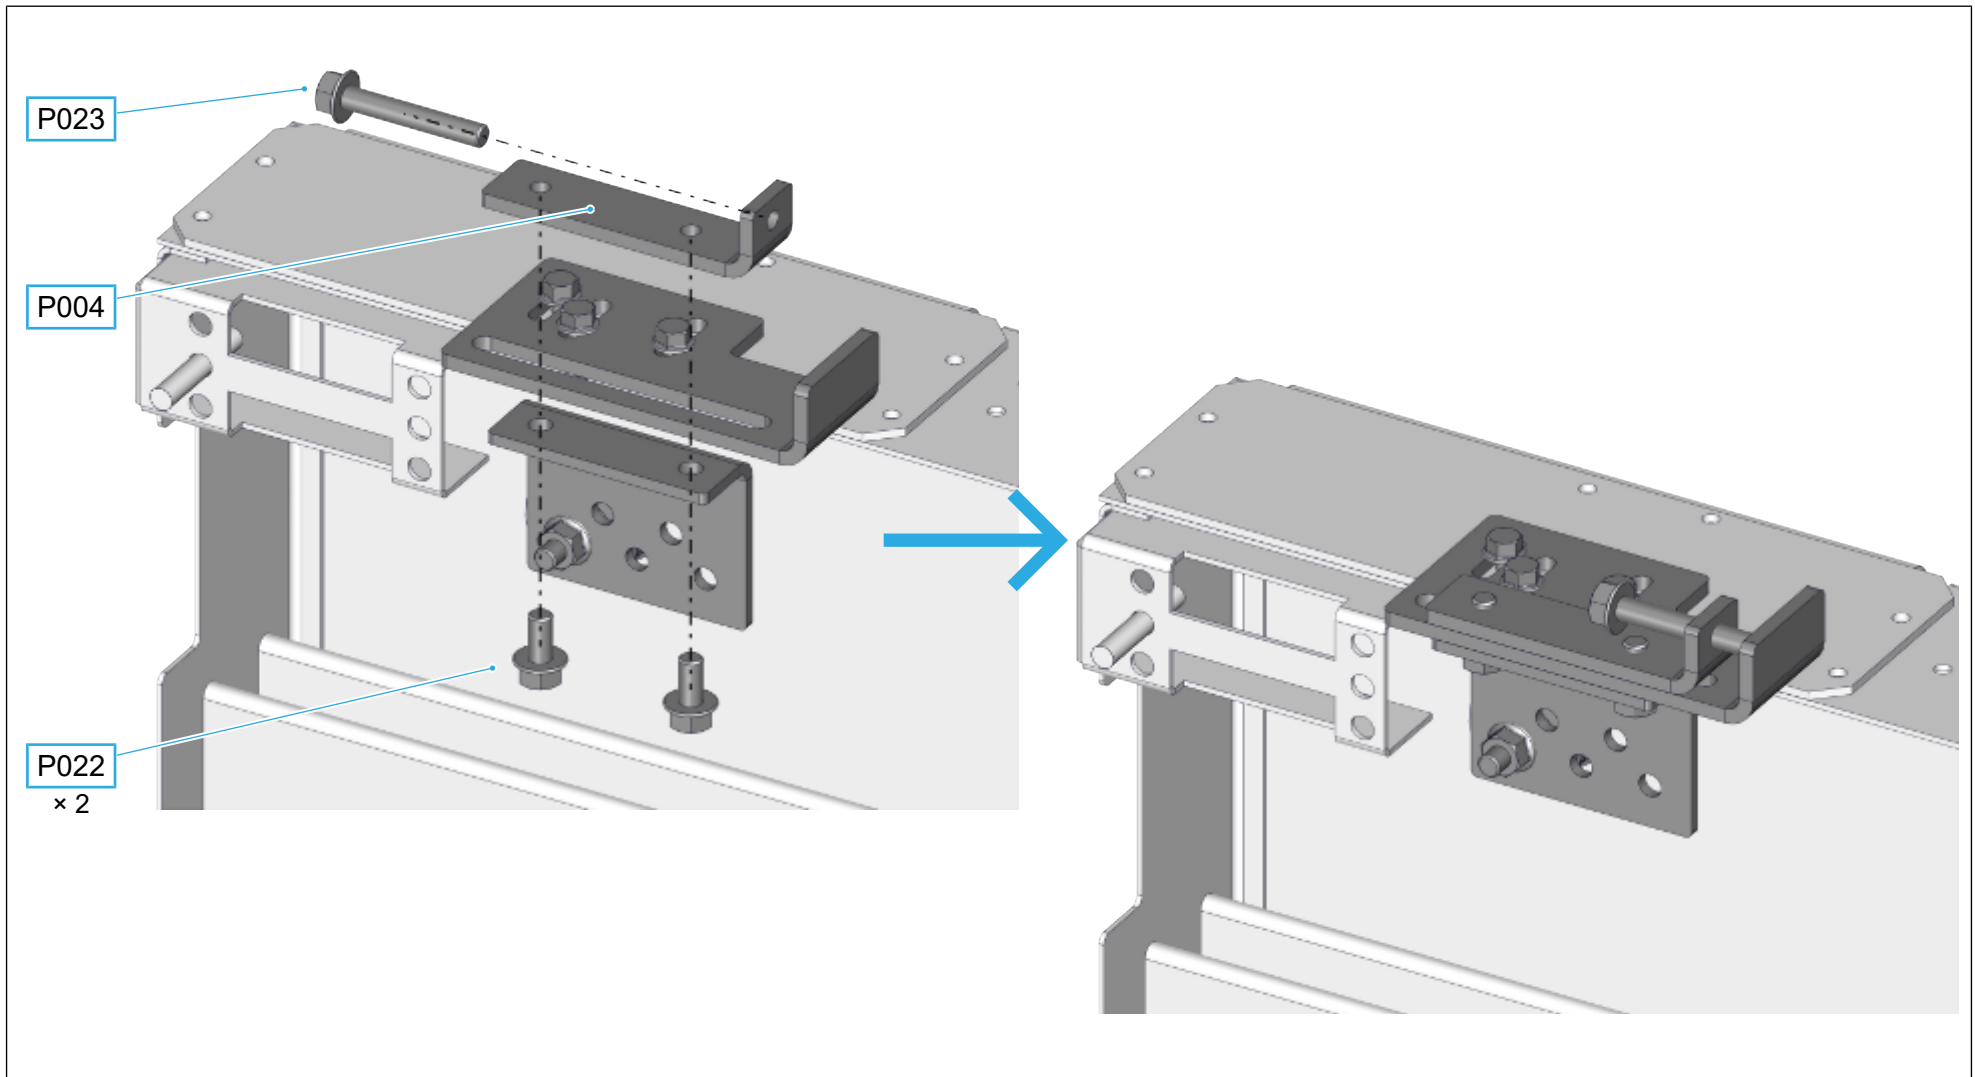

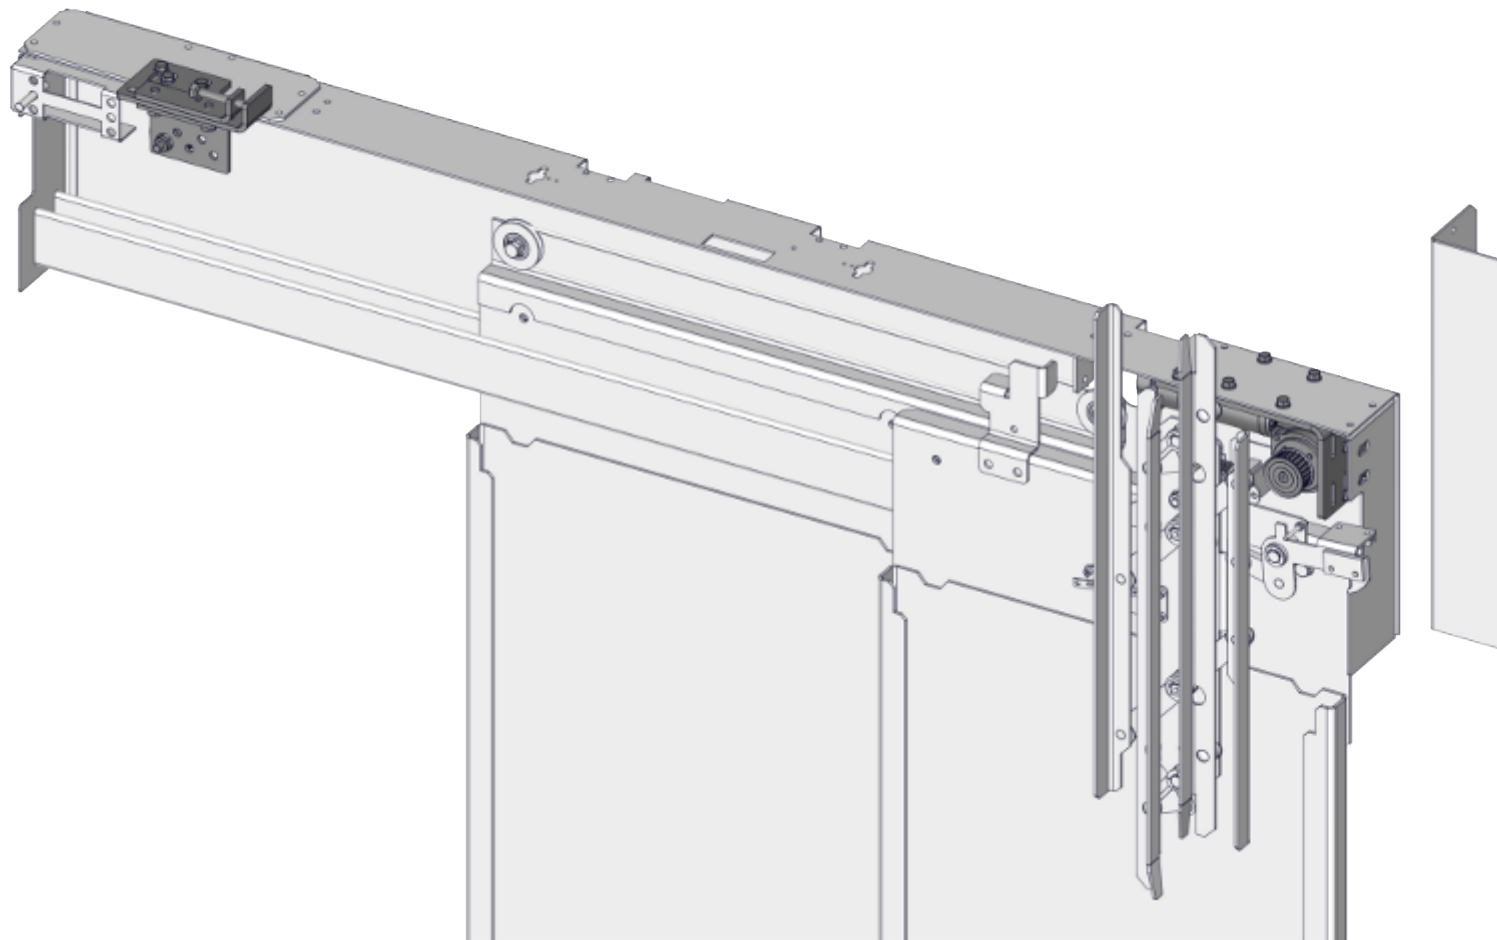


7.3 Mounting and tensioning the timing belt

Components

Pos.	Illustration	Item number	Description	Quantity
P006		1.20.60137	Timing belt, 5M	1
P012		1.20.60561	Clamping plate 5M	1



Tools

Pos.	Symbol	Description
T113		Combination wrench, size 13
T110		Combination wrench, size 10

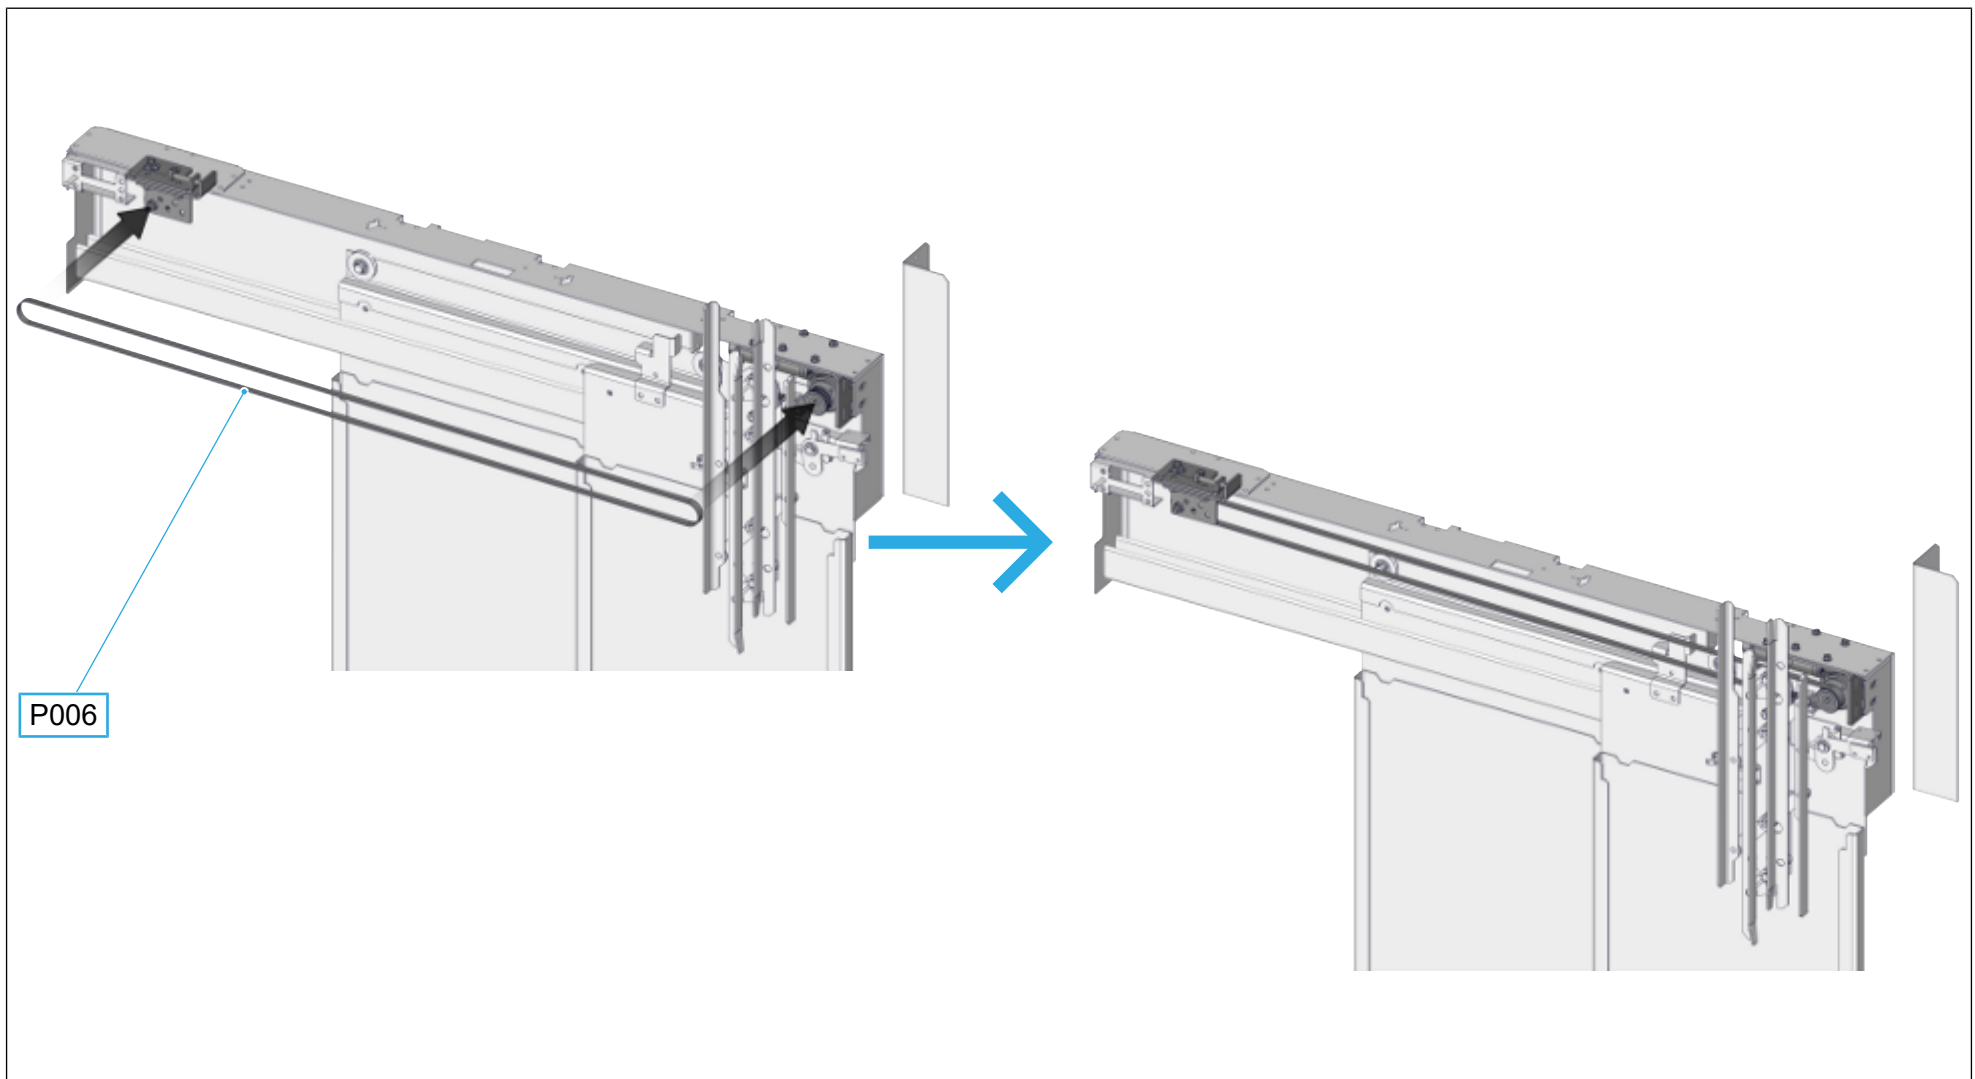


P012

Original timing belt lock

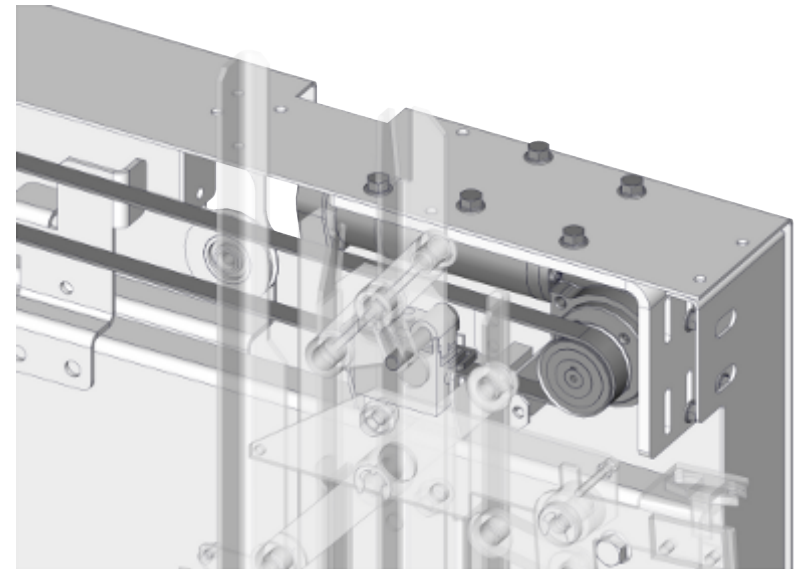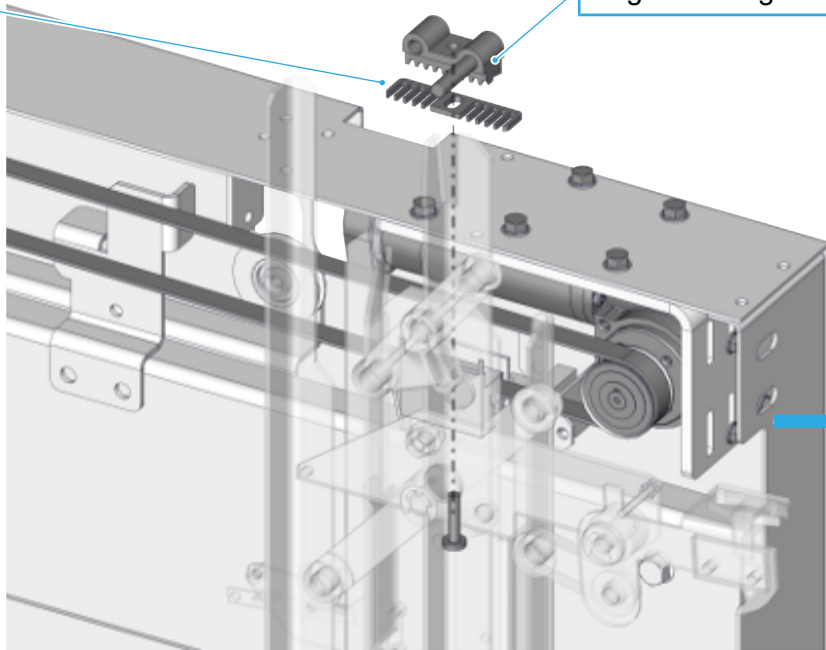

Use the separate clamping plate (P012) between the original timing belt lock and the timing belt.

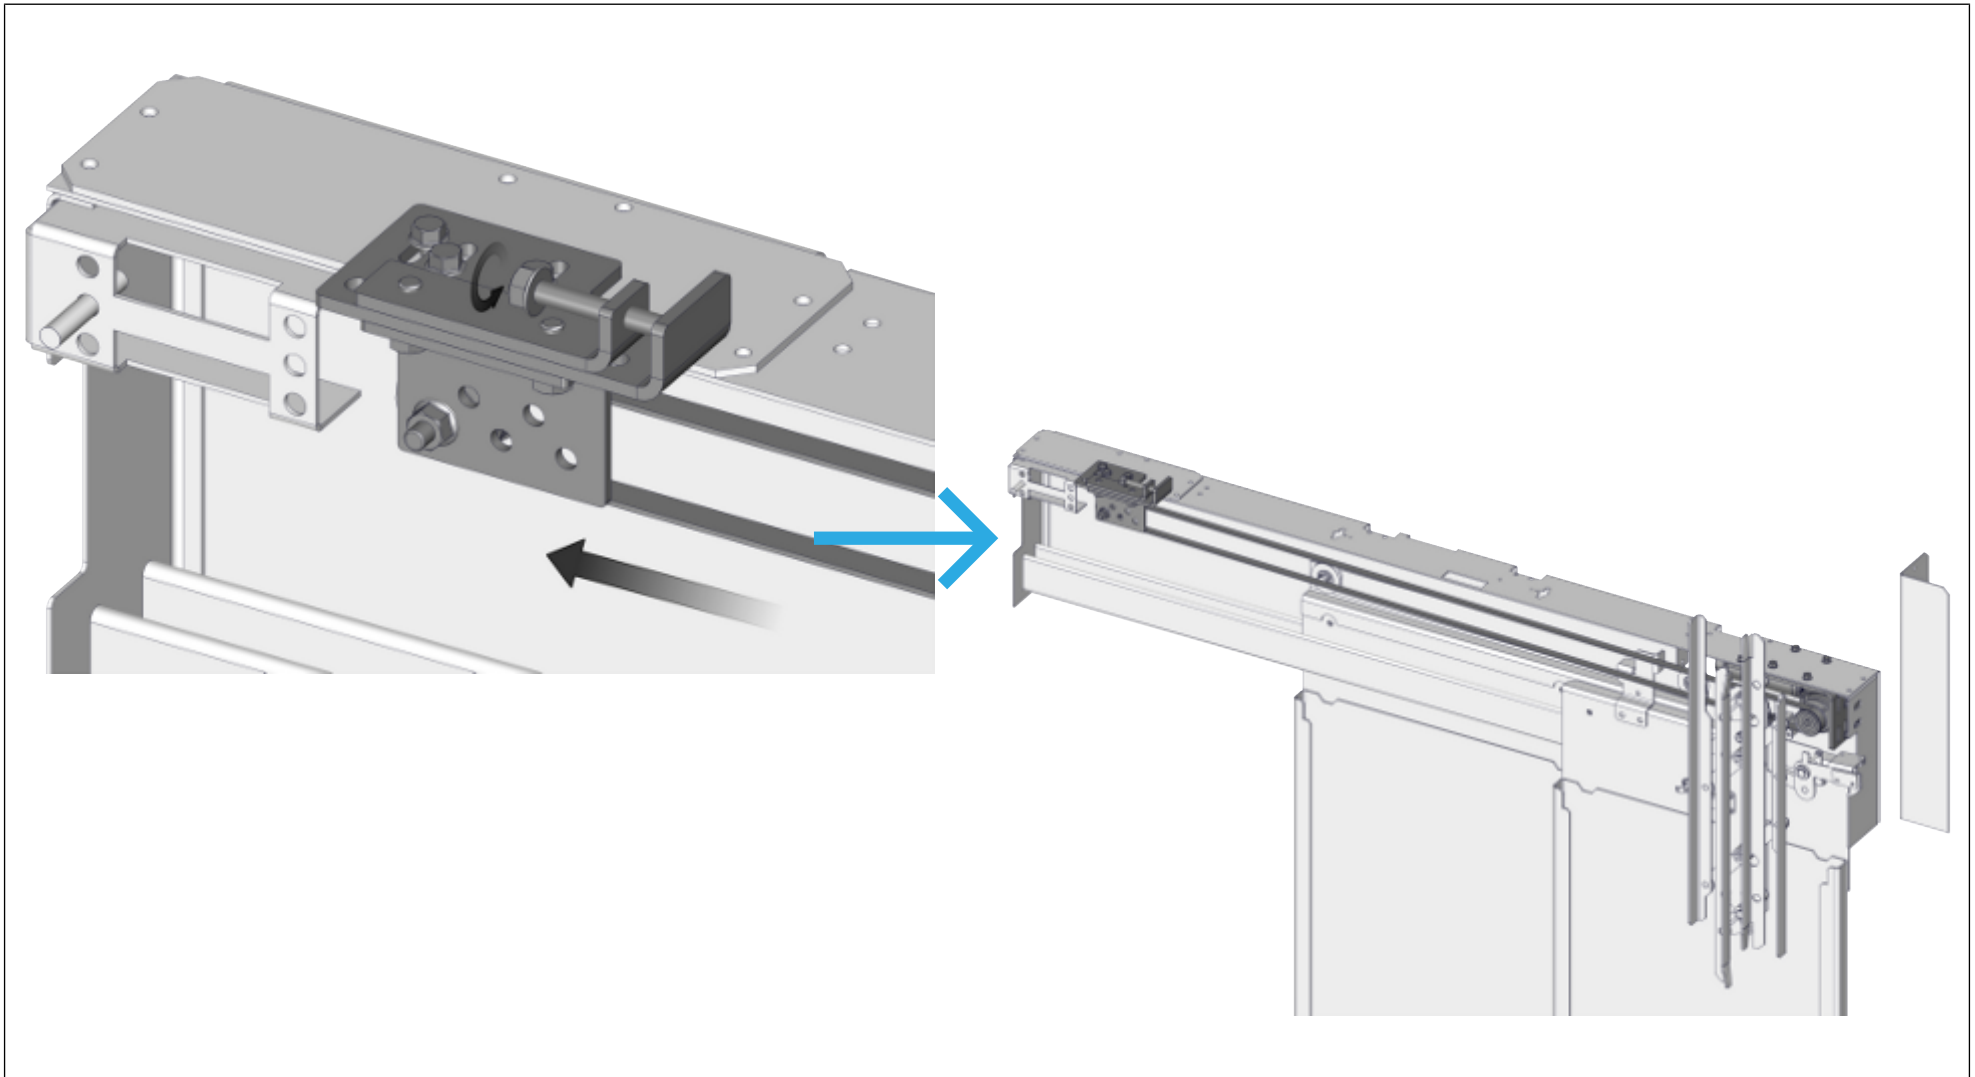

8 Mounting conversion variant 2: high door frame


8.1 Mounting the motor and bracket


Components


Pos.	Illustration	Item number	Description	Quantity
P002		8.20.200xx.xx	TSG motor	1
P007		1.20.60140	Timing belt pulley, D = 37 mm, 5M	1
P009		1.20.60551	Motor bracket, L-shaped	1
P014		1.36.00130	Locking screw M5 × 12 mm	4
P015		1.36.00135	Locking screw M6 × 12 mm	3
P017		1.36.00138	Locking screw M6 × 16 mm	2
P021		1.36.00502	Nut M6	2
P024		1.36.05040	Set screw M5 × 5 mm	1


Tools

Pos.	Symbol	Description
T108		Combination spanner, size 8
T110		Combination wrench, size 10
T202.5		Allen key, size 2.5
T606.5		Drill bit, Ø 6.5 mm

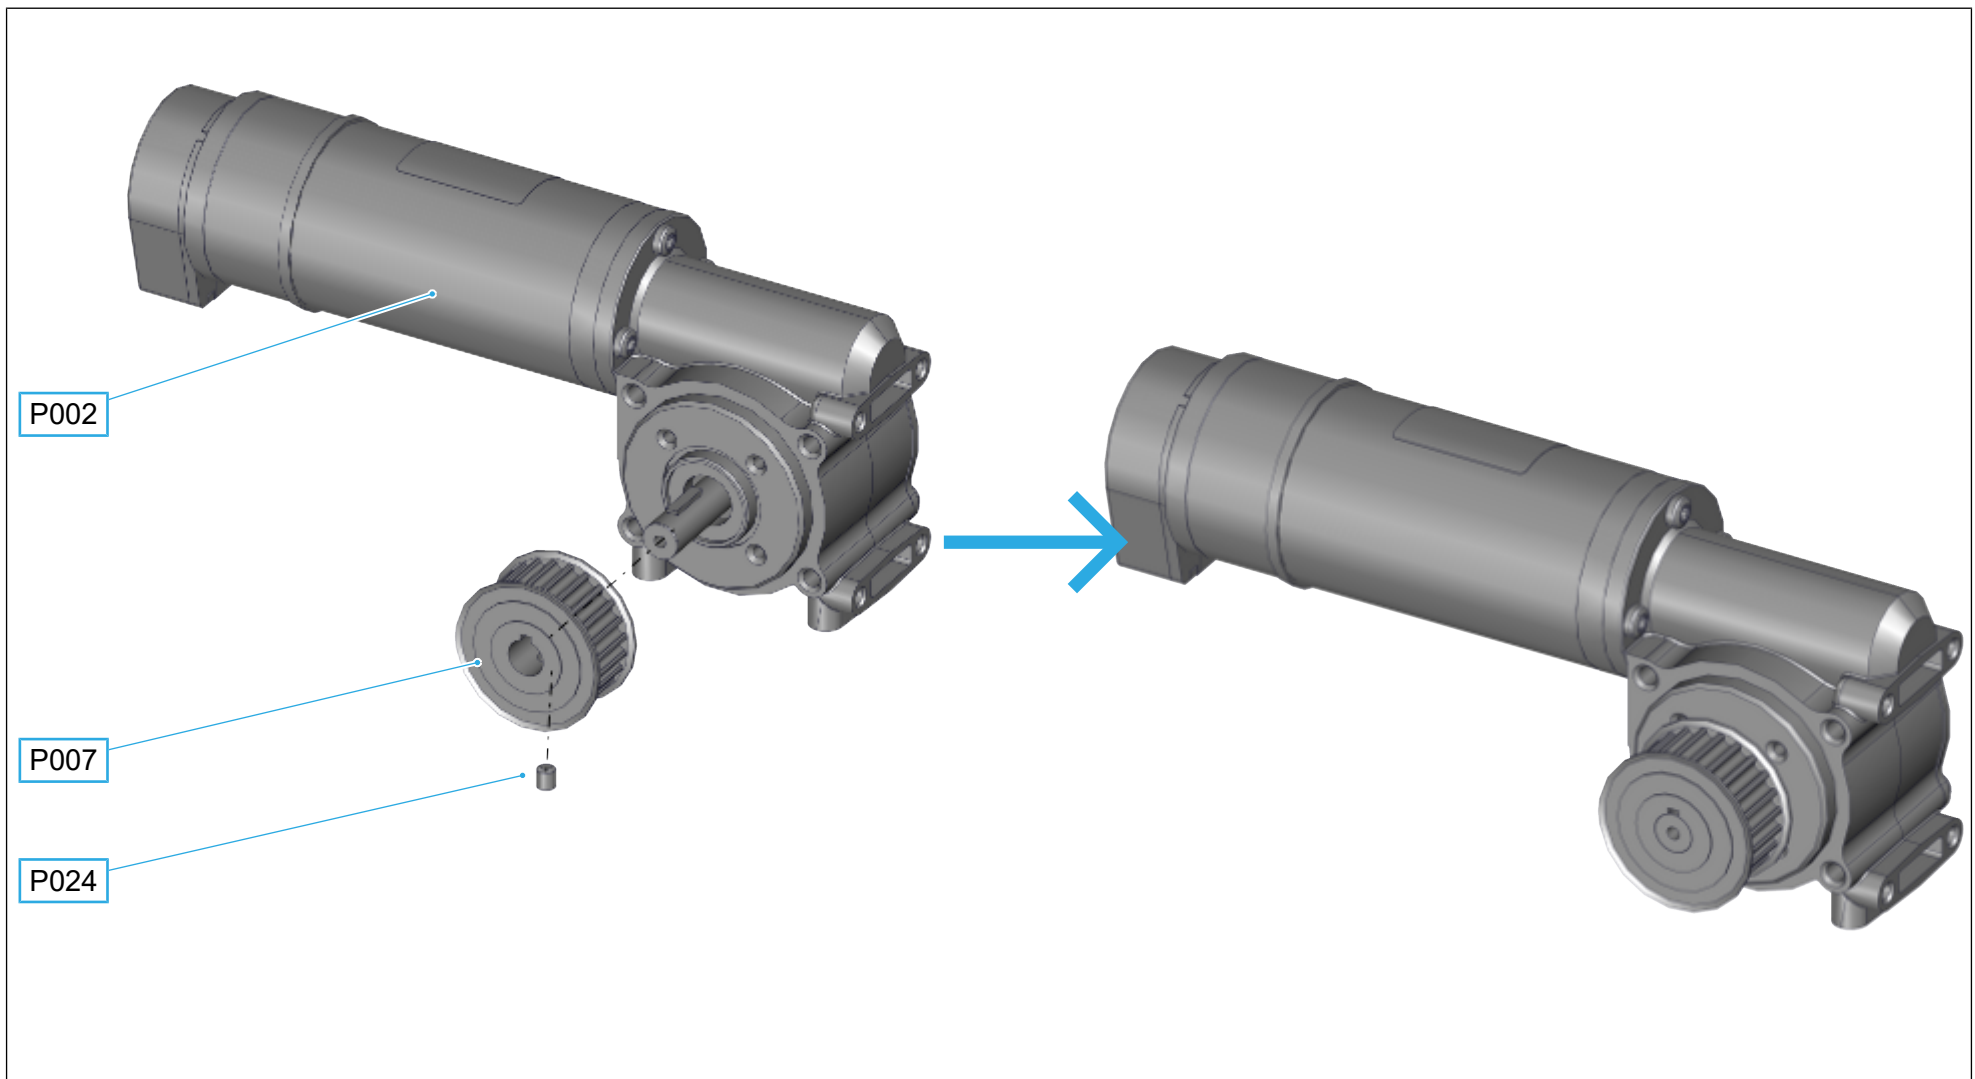


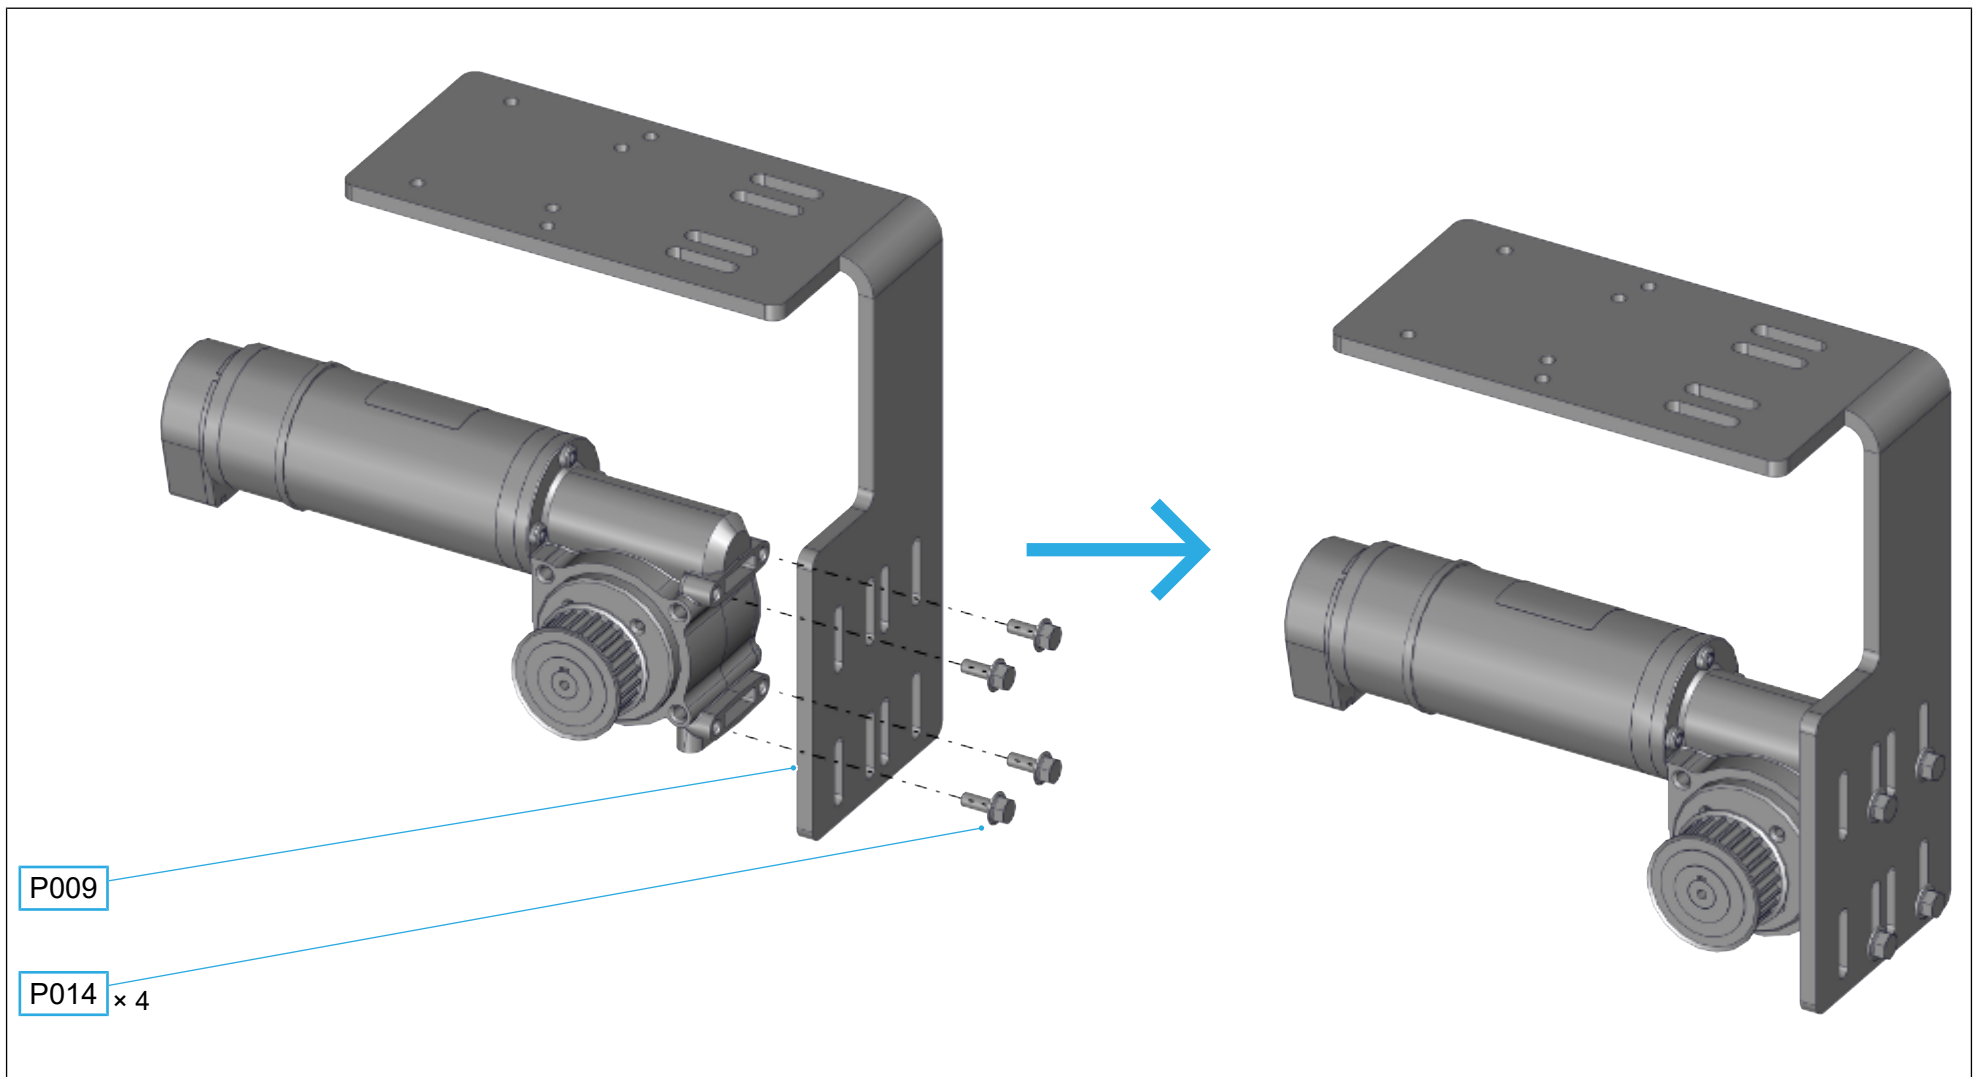


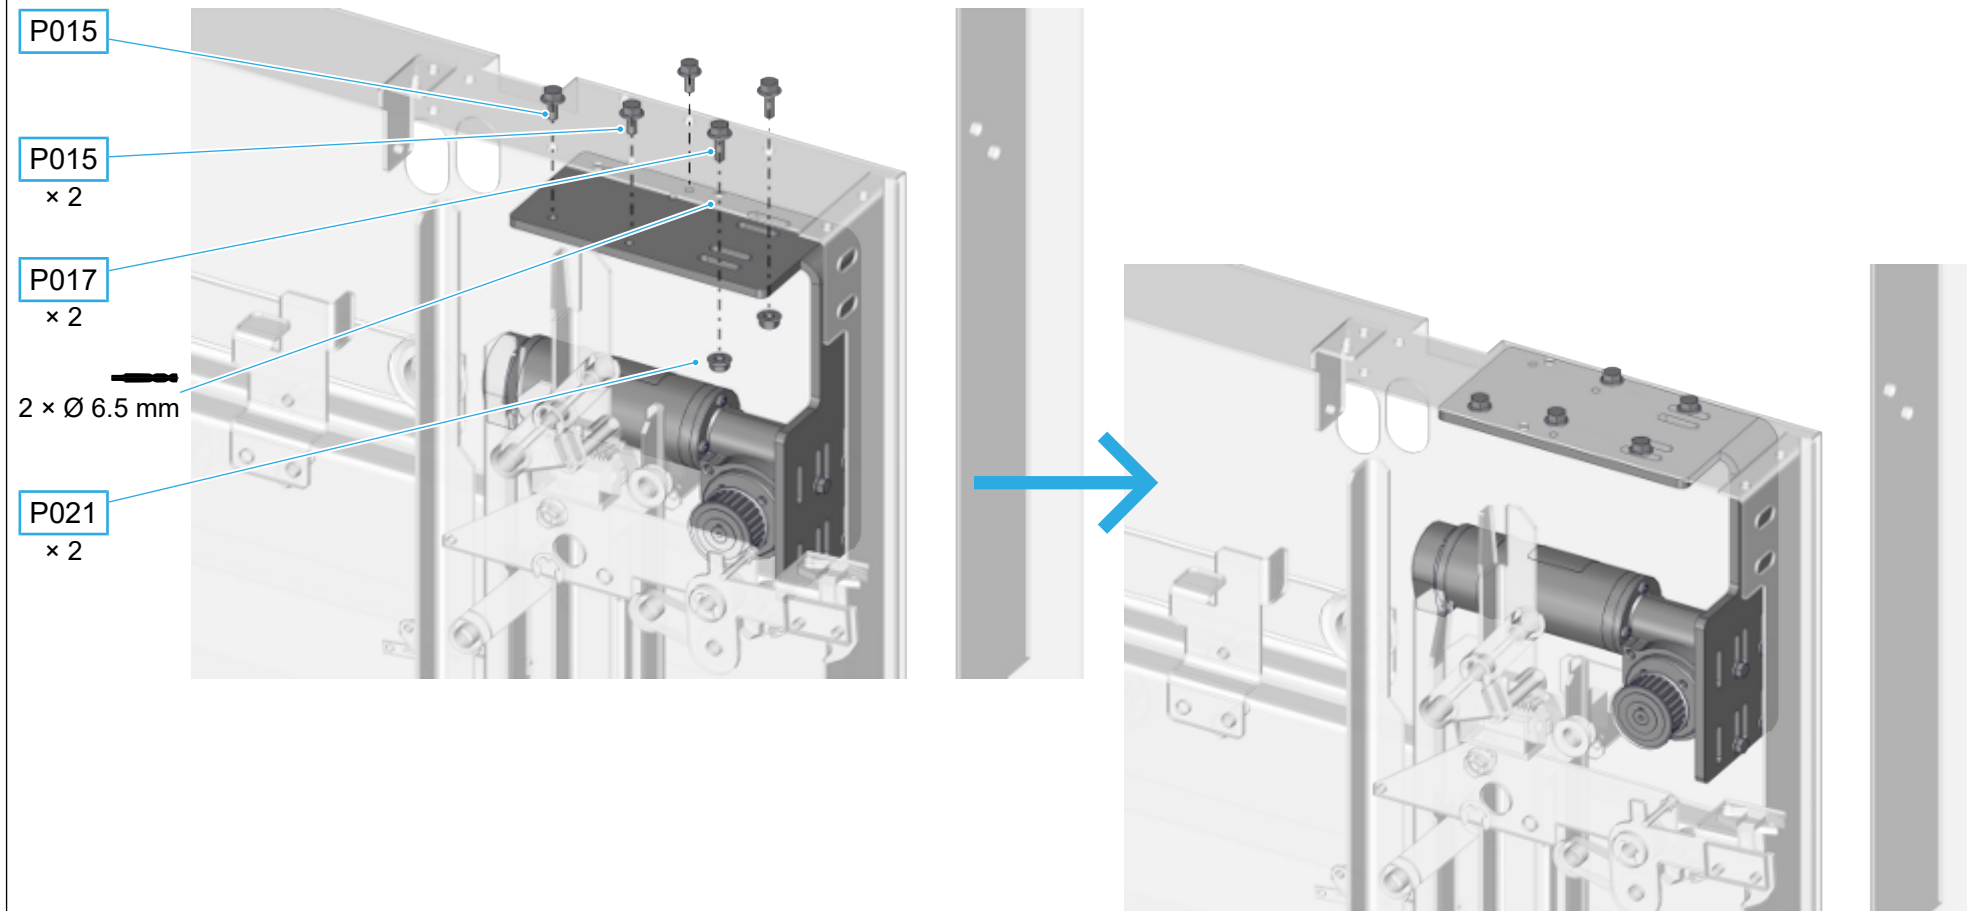

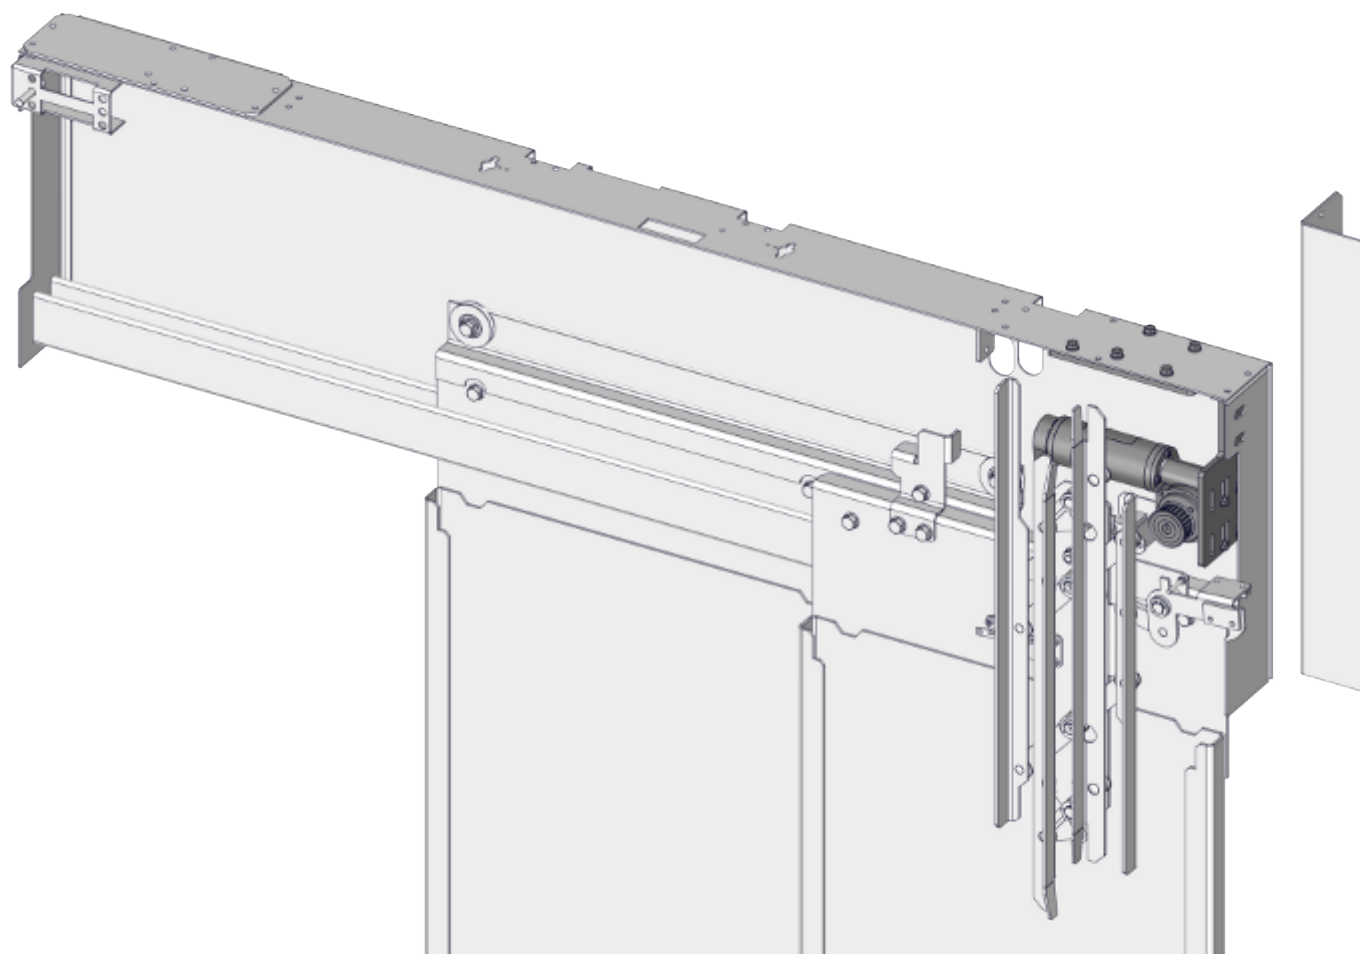

8.2 Mounting the deflection unit


Components


Pos.	Illustration	Item number	Description	Quantity
P003		1.20.60013	L-shaped bracket	1
P004		1.20.60110	L-shaped bracket	1
P005		1.20.60131	Deflection pulley, D = 37 mm, 5M	1
P010		1.20.60552	Angle bracket, C-shaped	1
P011		1.20.60555	L-shaped bracket	1
P013		1.36.00115	Hexagon head screw M8 × 40 mm	1
P016		1.36.00137	Locking screw M6 × 20 mm	3


Pos.	Illustration	Item number	Description	Quantity
P018		1.36.00169	Spring washer M8	1
P019		1.36.00440	Washer M8	1
P020		1.36.00501	Nut M8	1
P021		1.36.00502	Nut M6	3
P022		1.36.00710	Locking screw M8 × 16 mm	4
P023		1.36.00749	Locking screw M8 × 50 mm	1


Tools

Pos.	Symbol	Description
T110		Combination wrench, size 10
T113		Combination wrench, size 13

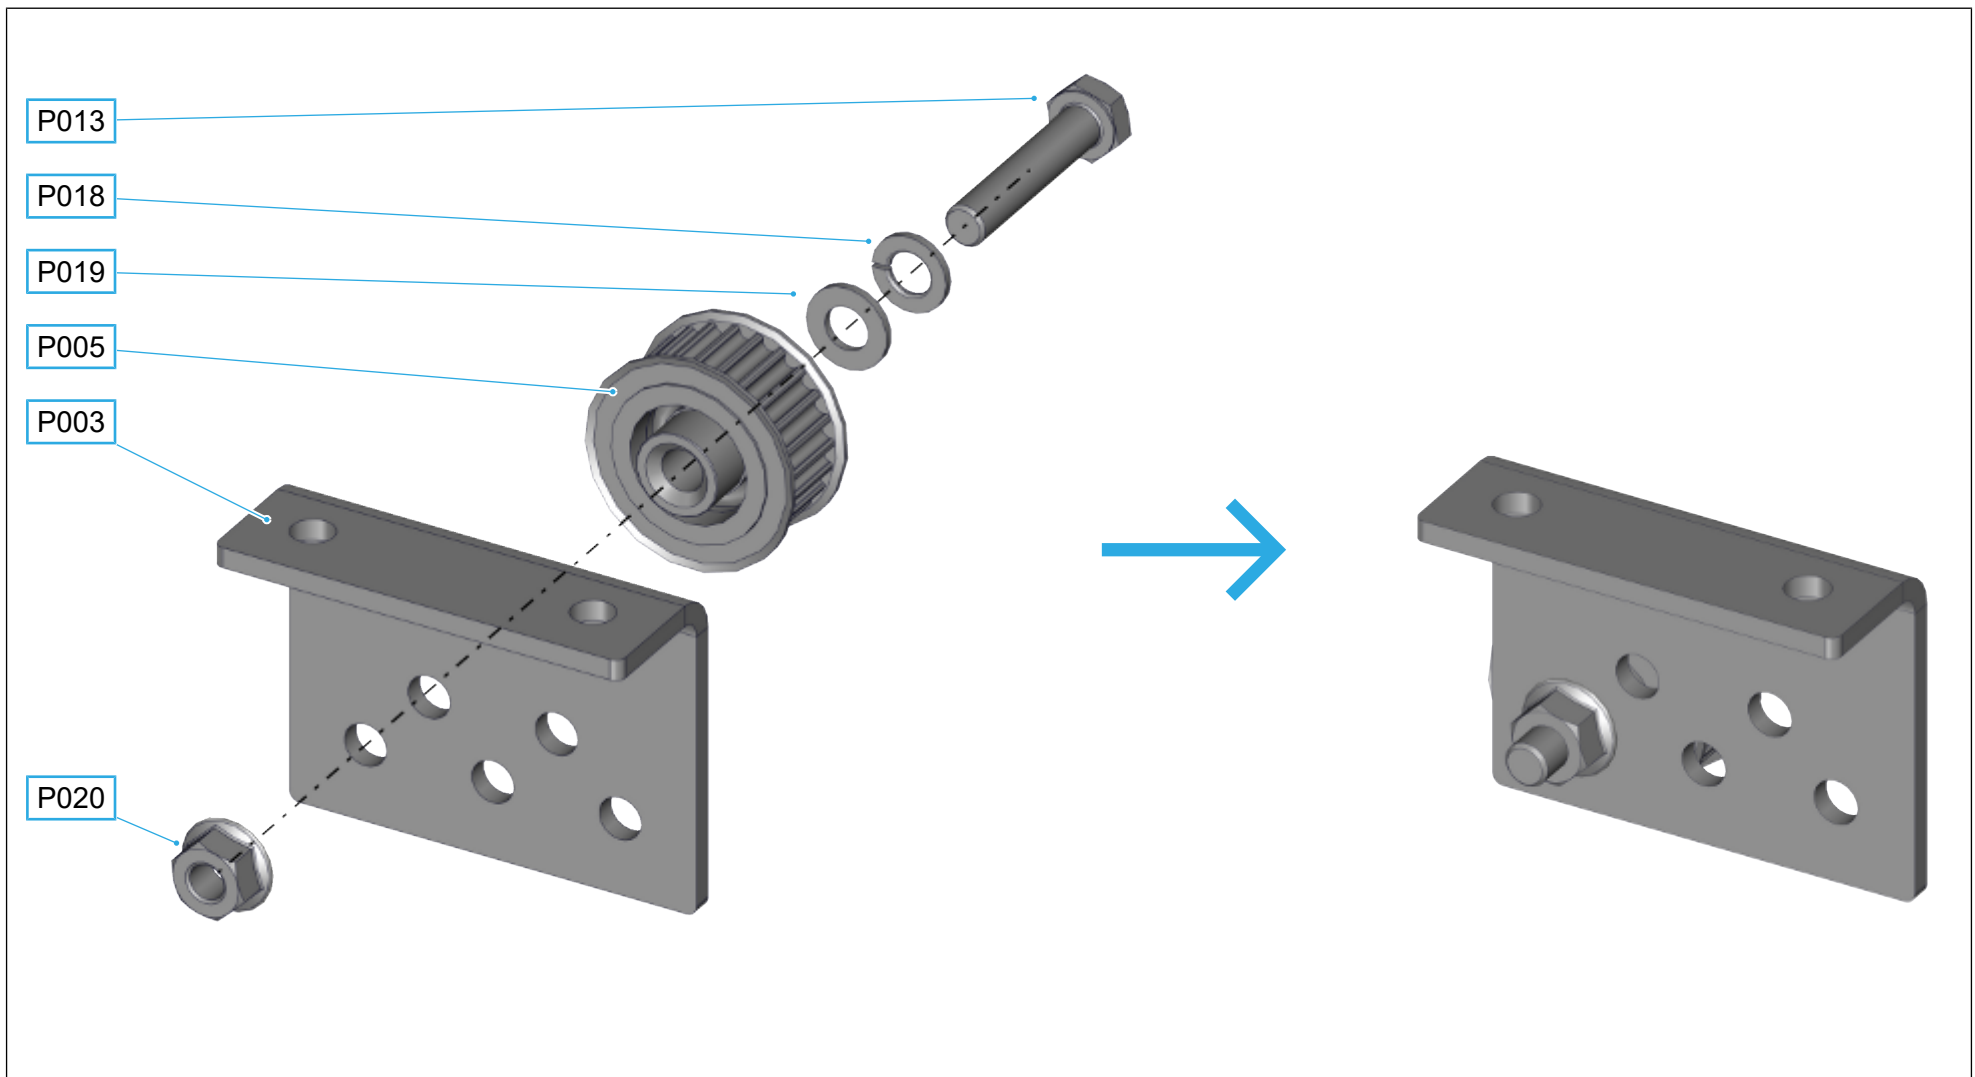

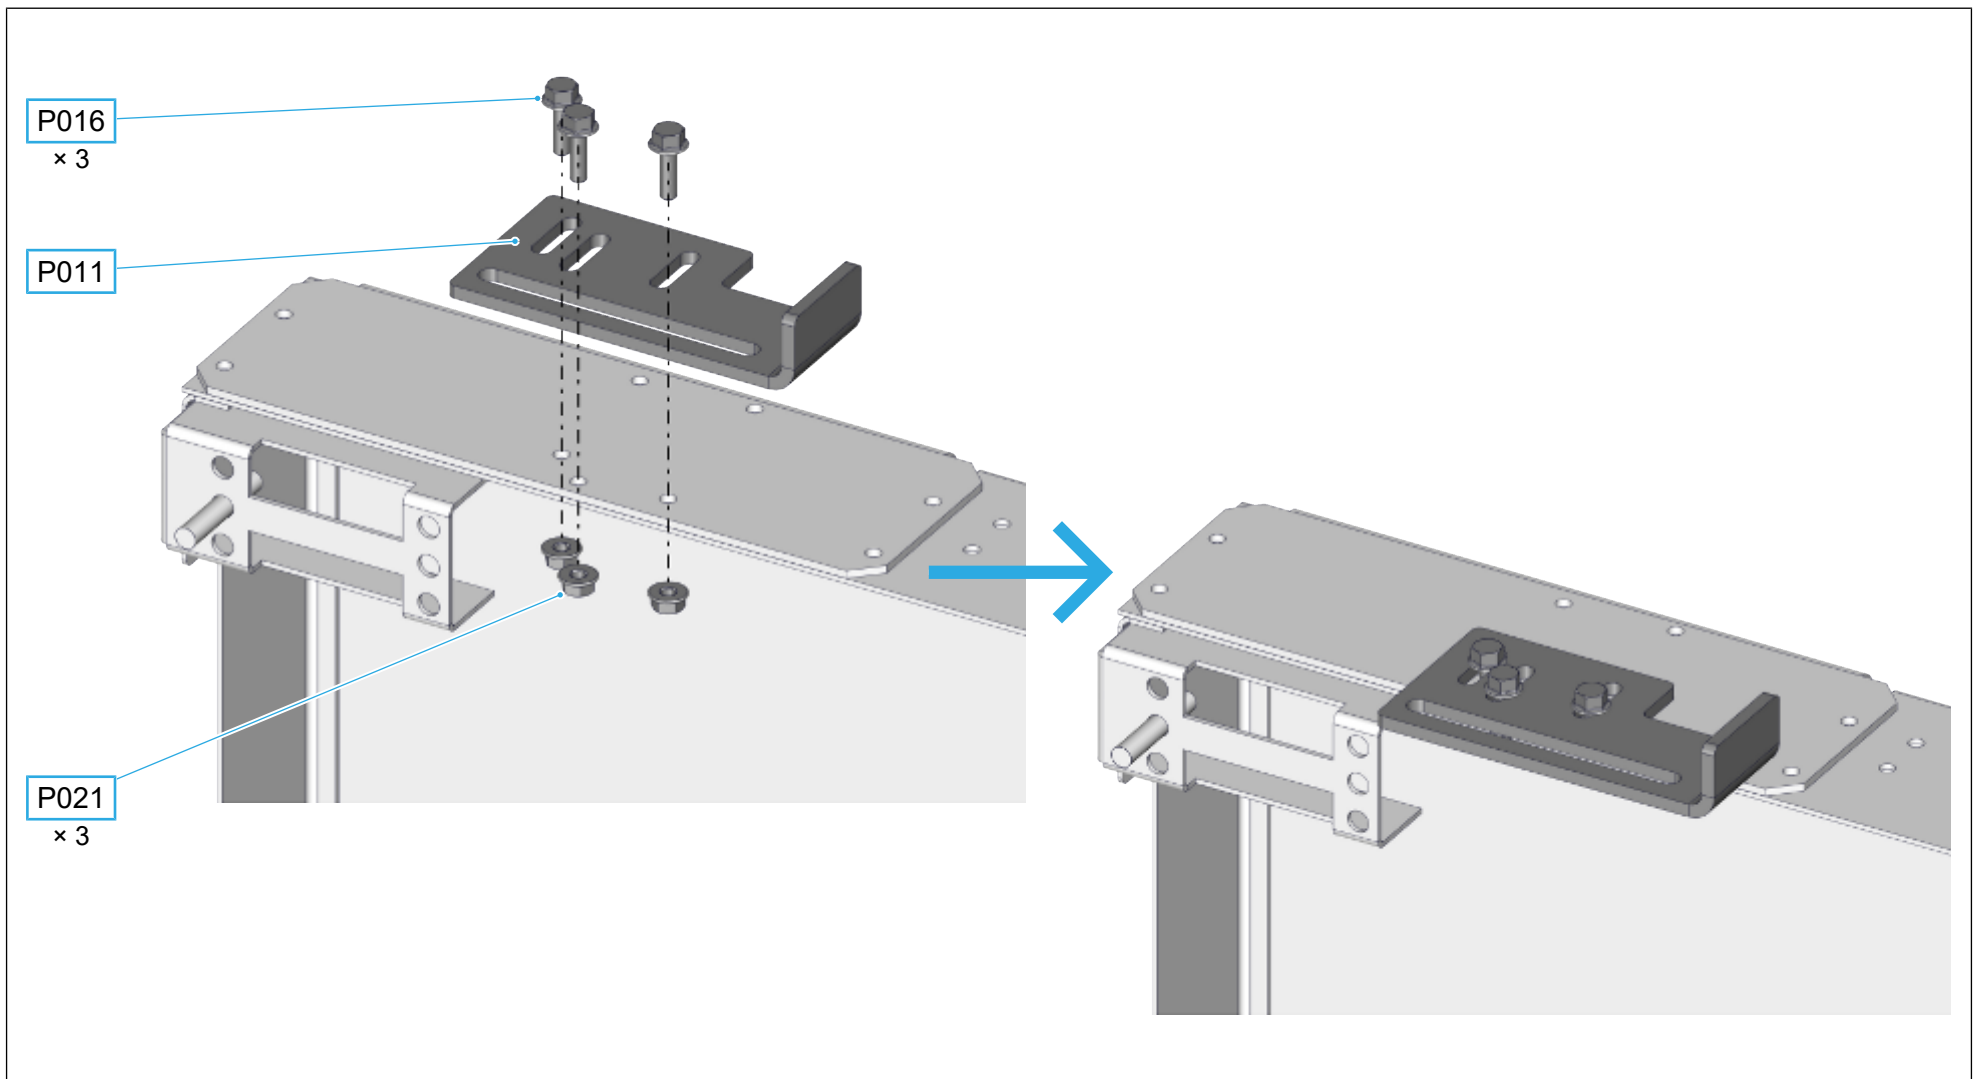

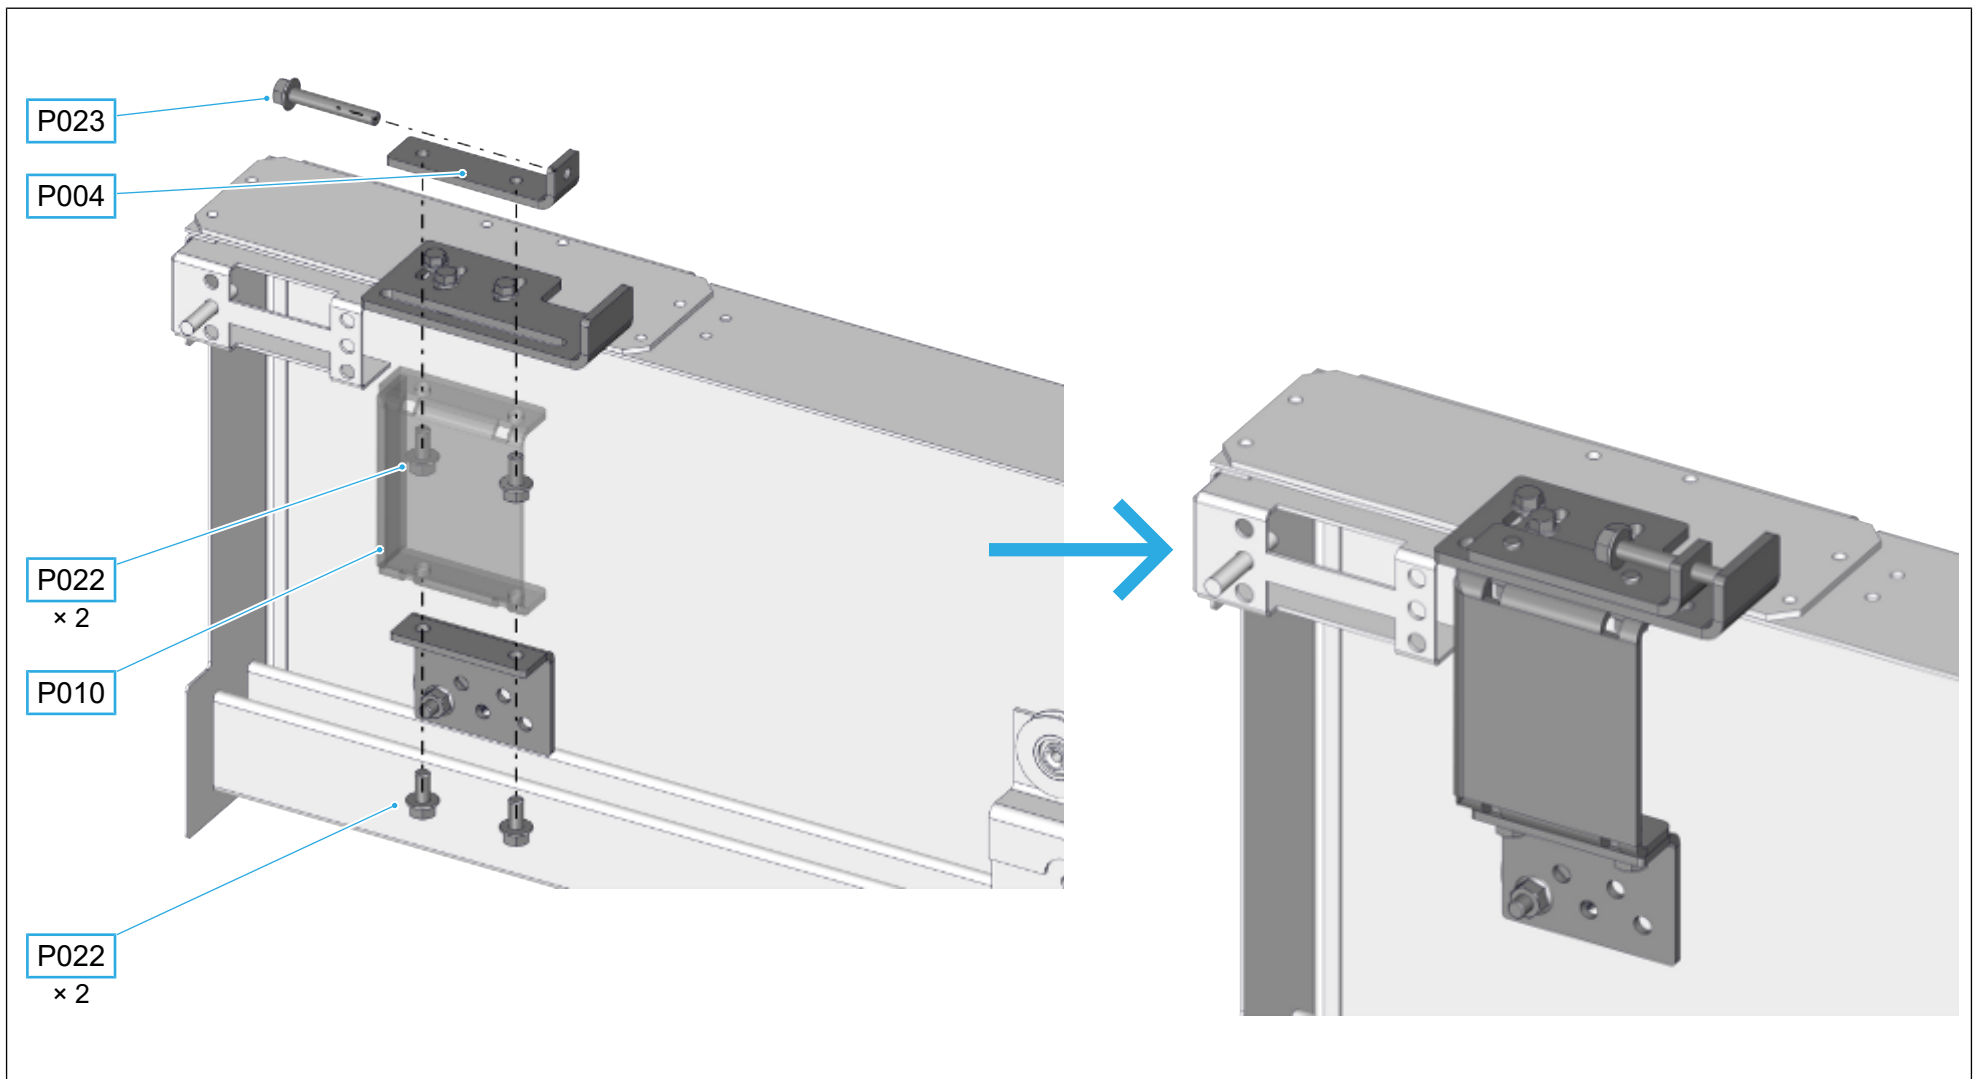

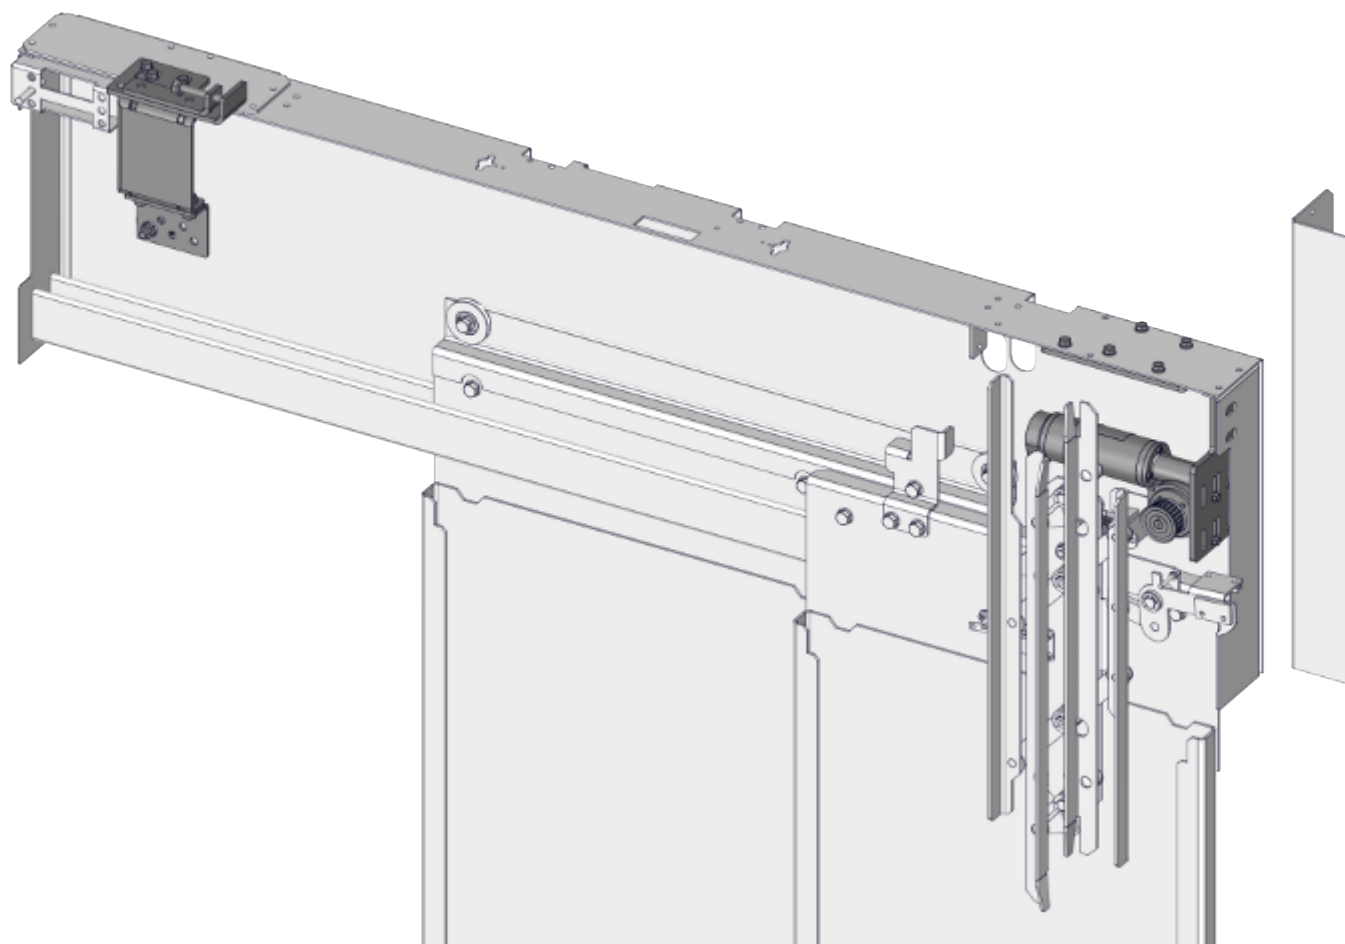


8.3 Mounting and tensioning the timing belt

Components

Pos.	Illustration	Item number	Description	Quantity
P006		1.20.60137	Timing belt, 5M	1
P012		1.20.60561	Clamping plate 5M	1



Tools

Pos.	Symbol	Description
T110		Combination wrench, size 10
T113		Combination wrench, size 13

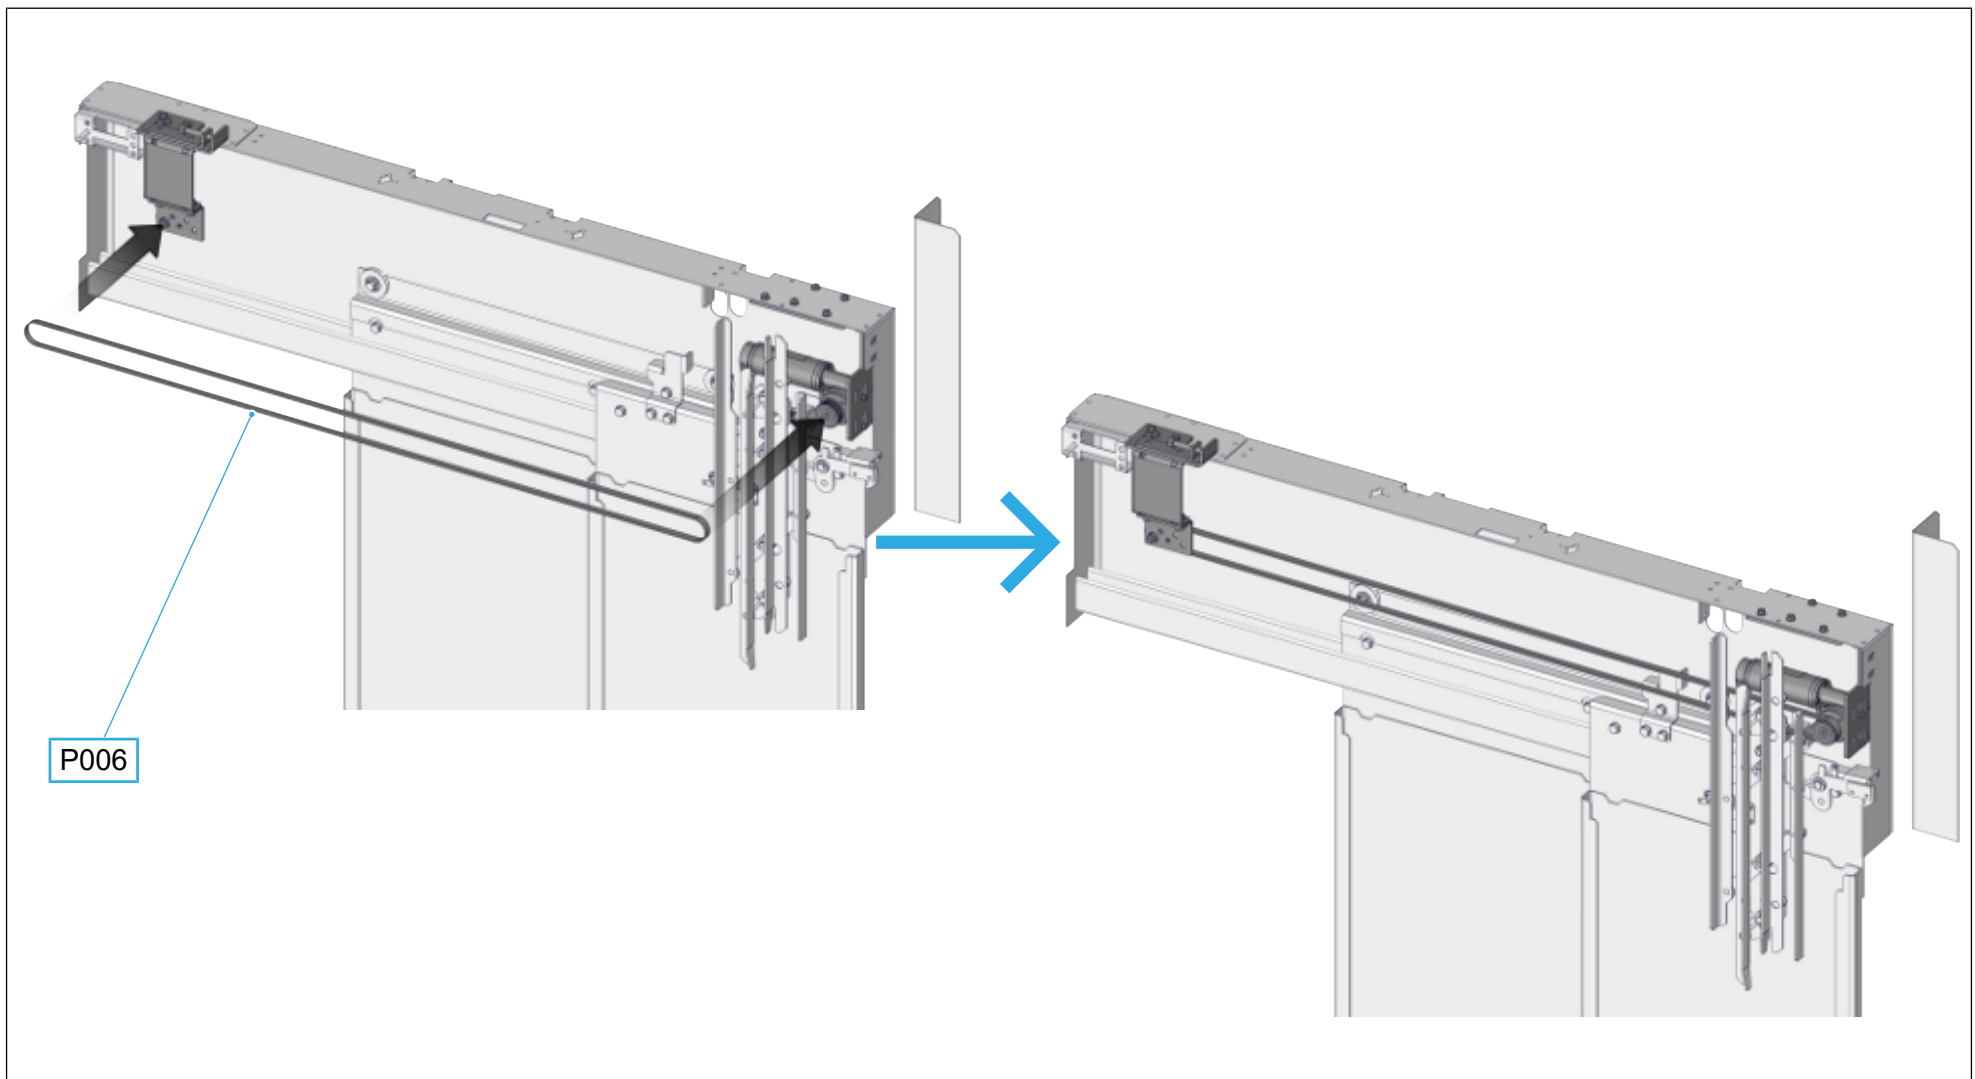


P012

Original timing belt lock

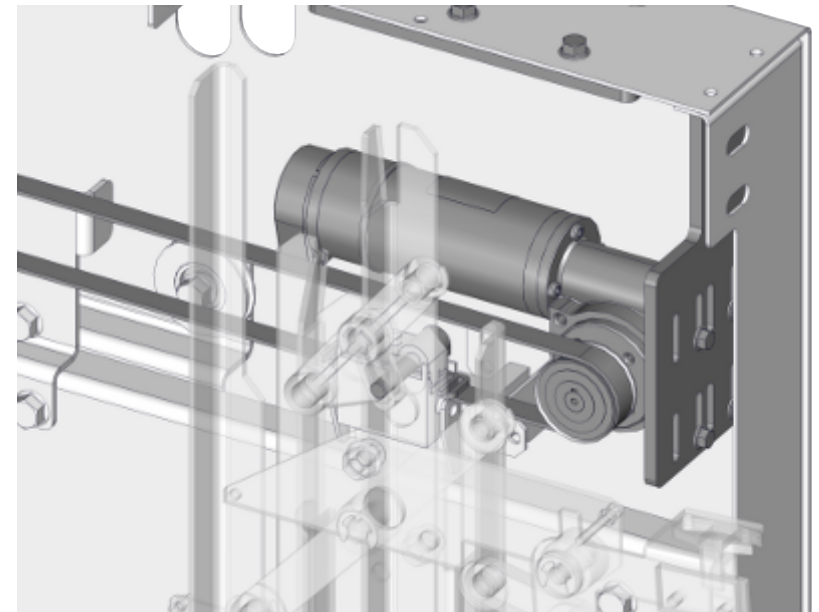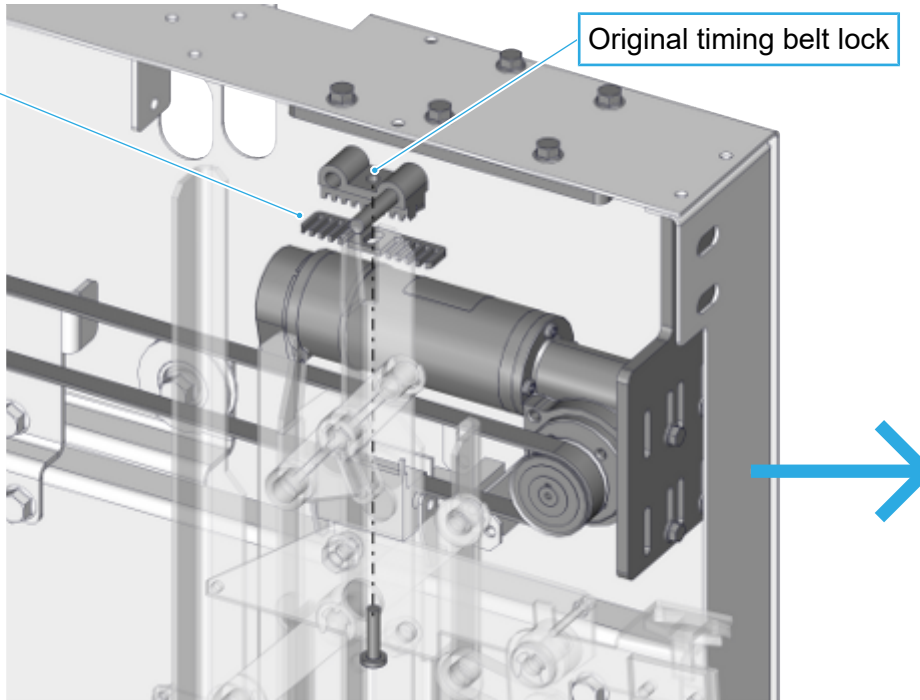

Use the separate clamping plate (P012) between the original timing belt lock and the timing belt.

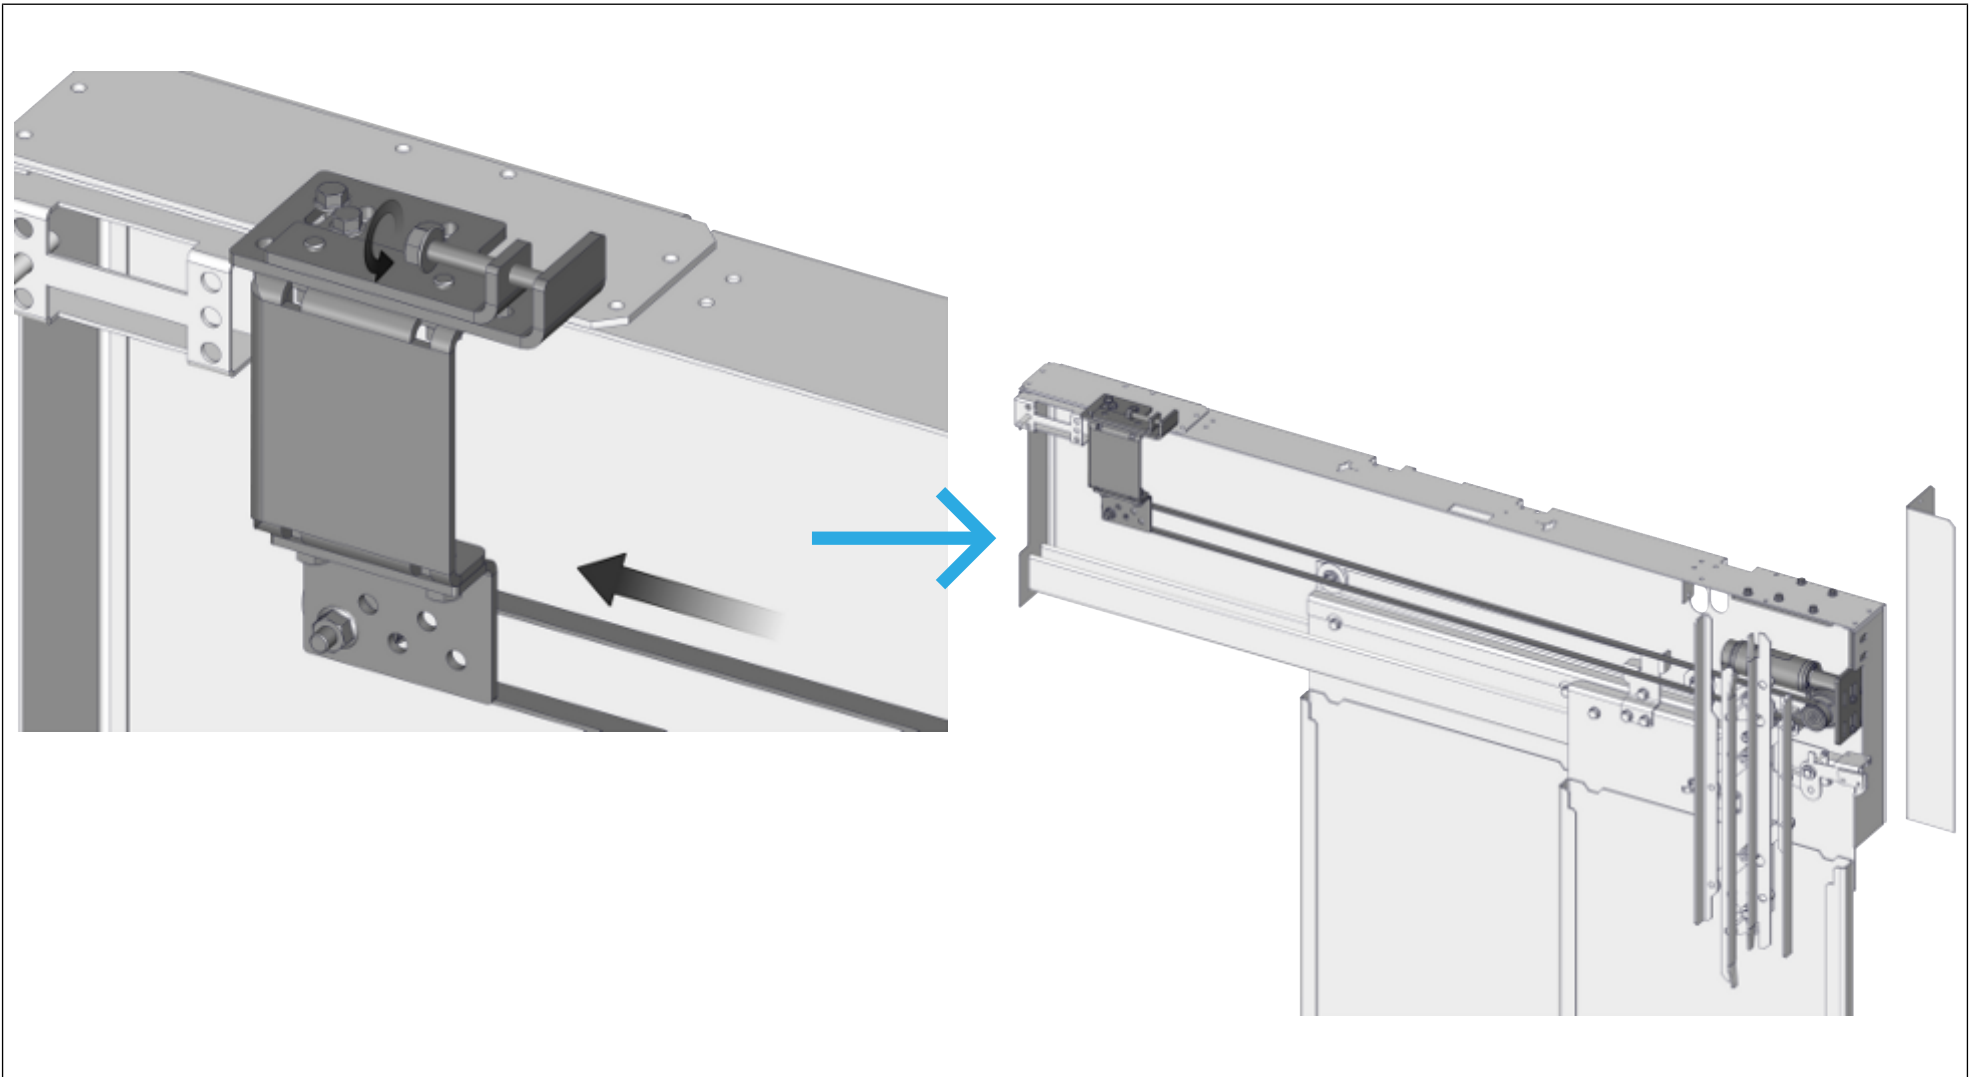

9 Fitting, connecting and commissioning the door control unit

Fitting, connecting and commissioning the door control unit are described in detail in the **assembly instructions** supplied with the door control unit.



Innovation meets Technology

